






TUNABLE BANDPASS FILTERS

- Designed for wavelength selection over wide spectral ranges (255 - 1700 nm)
- Employs patented TwinFilm™ technology
- Compatible with any broadband light source

AWARD WINNING TECHNOLOGY

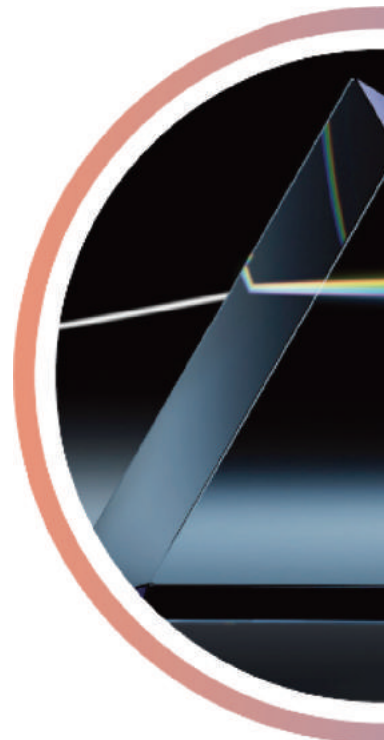

LIGHT SOURCES

- Powerful and Compact broadband light sources
- Low-noise with Versatile output modules
- Fully compatible with the FWS





TUNABLE LIGHT SOURCES


- Revolutionary Tunable Light Source
- Wide and Precise Spectral Wavelength Selection
- Versatile Applications in both Scientific and Industrial fields

AWARD WINNING LIGHT SOURCE




TUNABLE LASER SYSTEMS

- Tunable Pico-second Pulsed Supercontinuum Laser System
- One-box PLUG&PLAY System
- Easy, Effective and Reliable applications
- Fully Customizable to meet all your requirements

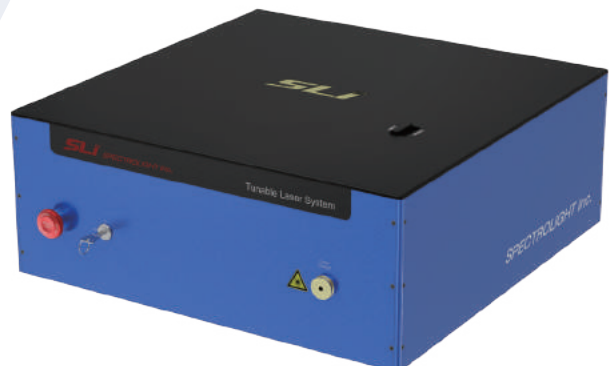

TUNABLE BANDPASS FILTERS

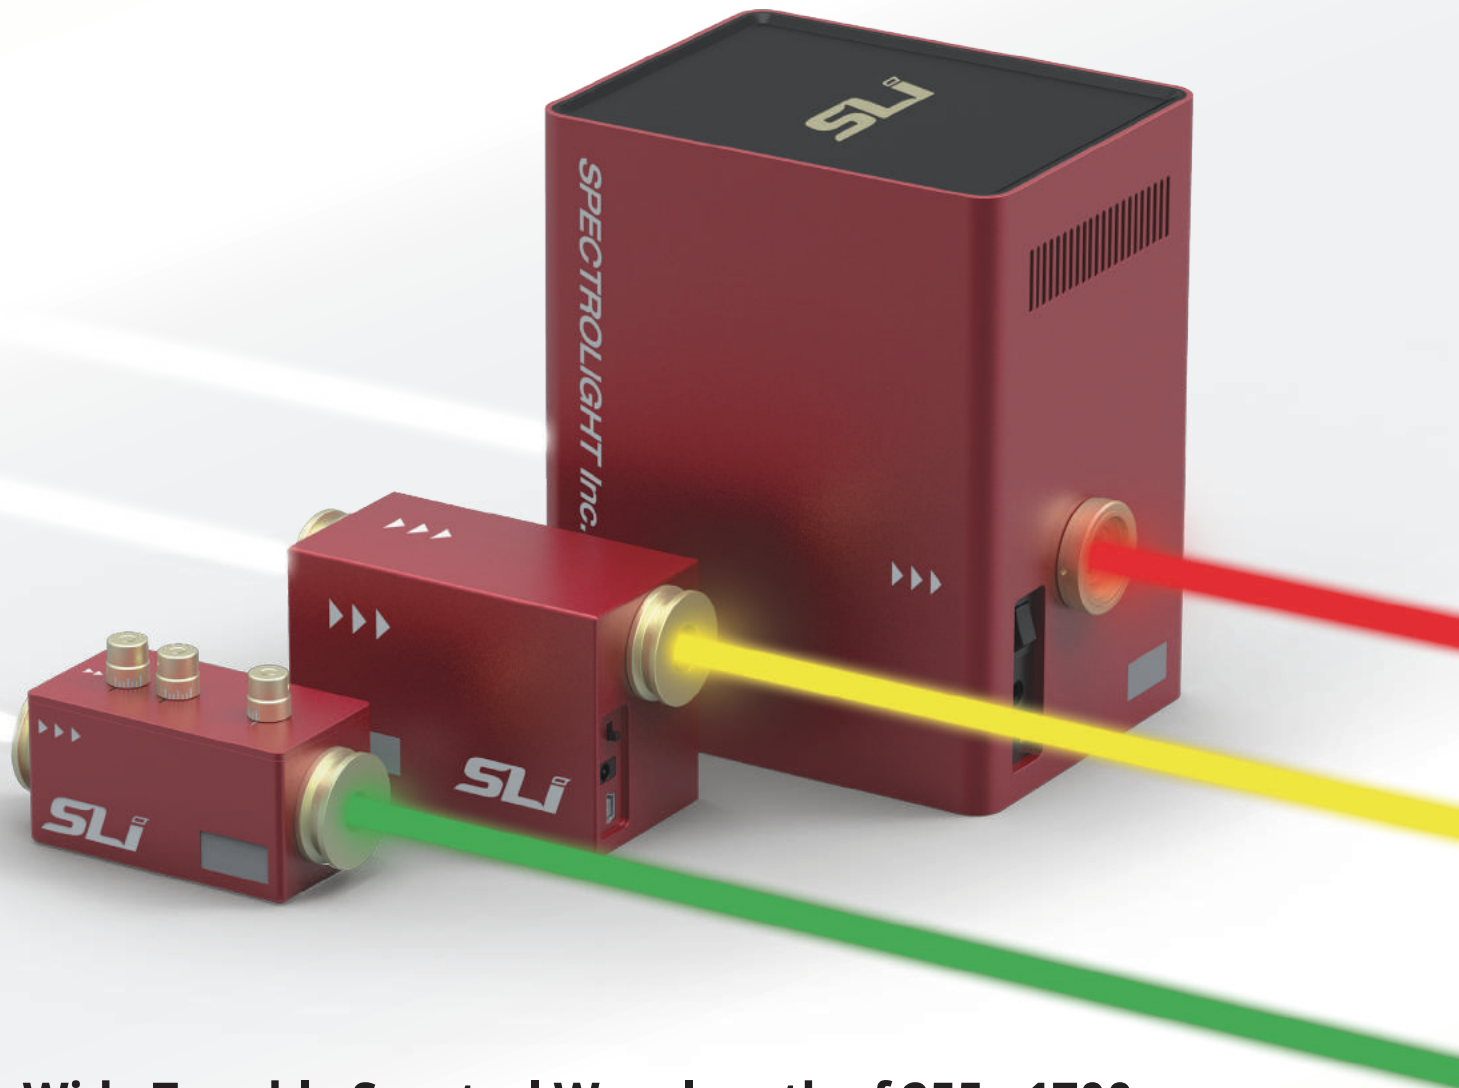

- Wide Tunable Spectral Wavelength of 255 - 1700 nm
- Relevant for both Excitation and Emission
- Compatible with all Broadband Light Sources
- Implementing the patented TwinFilm™ technology

Flexible Wavelength Selector (FWS)

Tunable bandpass filter for spectroscopy and spectral imaging

Flexible Wavelength Selector is a unique, compact optomechanical device that utilizes the patented TwinFilm™ technology to deliver precise wavelength tuning and adjustable bandwidth with the imaging advantages of a circular aperture filter.

FWS- Auto (Automated type)



Poly-RED



Poly-BLUE



Mono

FWS- Manual (Manual type)



Basic



High Resolution



CenterLine



Customized

Ideal for

- Fluorescence microscopy
- Hyperspectral imaging
- Life sciences instrumentation
- Machine vision
- Laboratory research

Key product advantages

- Broad wavelength tuning (255 - 1700 nm)
- Adjustable bandwidth (FWHM 2 - 15 nm, nominal)
- 5 / 10 mm circular aperture
- High Transmission efficiency (> 75 %)
- Compact and light-weight optomechanical device
- No beam deviation or walk-off during tuning



Flexible Wavelength Selector – Poly-RED


Model name	Spectral range (nm)
Poly-RED-UV	280 - 390
Poly-RED-VIS	430 - 790
Poly-RED-IR	775 - 1150
Poly-RED-SWIR	1140 - 1700
Poly-RED-Custom	Custom range

Spectral range (nm)	Tunable bandwidth (nm)
255 - 700	2 - 15
701 - 890	3 - 15
891 - 1500	5 - 15
1475 - 1700	7 - 13

* Center Wavelength tuning range can vary by a few nanometers depending on the product.

* Minimum step size of center wavelength : 1 nm

* Step size of bandwidth (FWHM) : 1 nm

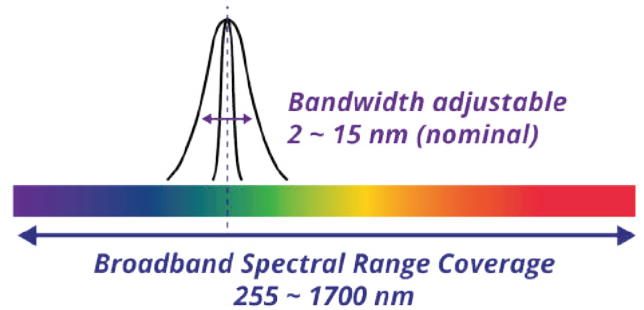

	FWHM	2 - 15								3 - 15		5 - 15				7 - 13	
	CWL	255 - 290	280 - 310	310 - 350	348 - 390	385 - 435	430 - 490	485 - 550	545 - 620	615 - 700	690 - 790	775 - 890	880 - 1015	1000 - 1150	1140 - 1310	1300 - 1500	1475 - 1700
Poly-RED-UV			●	●	●												
Poly-RED-VIS							●	●	●	●	●						
Poly-RED-IR												●	●	●			
Poly-RED-SWIR															●	●	●
Poly-RED-Custom						Up to 9 in one device											


Aperture size

Poly-RED-A5	5 mm	Suitable for supercontinuum lasers
Poly-RED-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

* For optimal performance input light source must be collimated

Full Specifications

	Poly-RED-A5	Poly-RED-A10
Spectral range (nm)	255-1700	255-1700
Bandwidth (FWHM) (nm)	2-15 (nominal)	2-15 (nominal)
Aperture size (mm)	5	10
Out of band Blocking	OD 10 up to 1700 nm	
Step size of center wavelength (nm)	1.0	
Step size of bandwidth (FWHM) (nm)	1.0	
Wavelength accuracy (nm) : CWL, FWHM	< 1 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM > 10 nm)	
Scanning speed (ms)	20 - 200 ms (depending on step size)	
Software	FWS-Auto ver 4.1	
Dimension (L x W x H, mm)	186.2 x 124 x 214	
Input power	DC 12 V, 5 A	
Electric requirement	AC 100 - 240 V, 50/60 Hz	
Data interface	USB 2.0	
Weight (kg)	4.2	

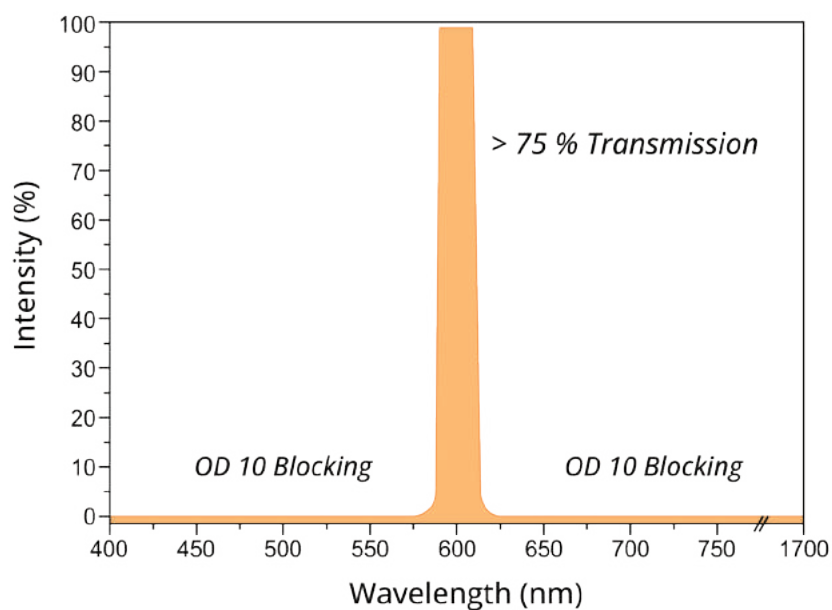


Flexible Wavelength Selector – Poly-BLUE

Model name	Spectral range (nm)
Poly-BLUE-UV	280 - 390
Poly-BLUE-VIS	430 - 790
Poly-BLUE-IR	775 - 1150
Poly-BLUE-SWIR	1140 - 1700
Poly-BLUE-Custom	Custom range

* Center Wavelength tuning range can vary by a few nanometers depending on the product.

* Minimum step size of center wavelength : 1 nm

* Bandwidth (FWHM) Fixed : 10 or 20 nm (nominal)

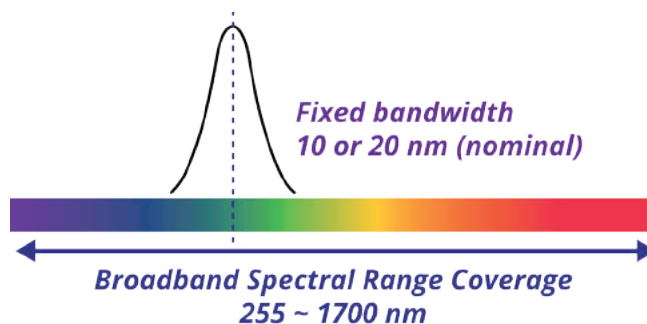

	FWHM	10 or 20 (nominal)															
	CWL	255 - 290	280 - 310	310 - 350	348 - 390	385 - 435	430 - 490	485 - 550	545 - 620	615 - 700	690 - 790	775 - 890	880 - 1015	1000 - 1150	1140 - 1310	1300 - 1500	1475 - 1700
Poly-BLUE-UV			●	●	●												
Poly-BLUE-VIS							●	●	●	●	●						
Poly-BLUE-IR												●	●	●			
Poly-BLUE-SWIR															●	●	●
Poly-BLUE-Custom						Up to 9 in one device											


Aperture size

Poly-BLUE-A5	5 mm	Suitable for supercontinuum lasers
Poly-BLUE-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

* For optimal performance input light source must be collimated

Full Specifications

	Poly-BLUE-A5	Poly-BLUE-A10
Spectral range (nm)	255-1700	255-1700
Bandwidth (FWHM) (nm)	10 or 20 (fixed)	10 or 20 (fixed)
Aperture size (mm)	5	10
Out of band Blocking	OD 5 in tuning range, OD 10 in spectral range up to 1700 nm	
Step size of center wavelength (nm)	1.0	
Step size of bandwidth (FWHM) (nm)	1.0	
Wavelength accuracy (nm) : CWL, FWHM	< 1 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM > 10 nm)	
Scanning speed (ms)	20 - 200 ms (depending on step size)	
Software	FWS-Auto ver 4.1	
Dimension (L x W x H, mm)	136.7 x 124 x 214	
Input power	DC 12 V, 5 A	
Electric requirement	AC 100 - 240 V, 50/60 Hz	
Data interface	USB 2.0	
Weight (kg)	3.15	

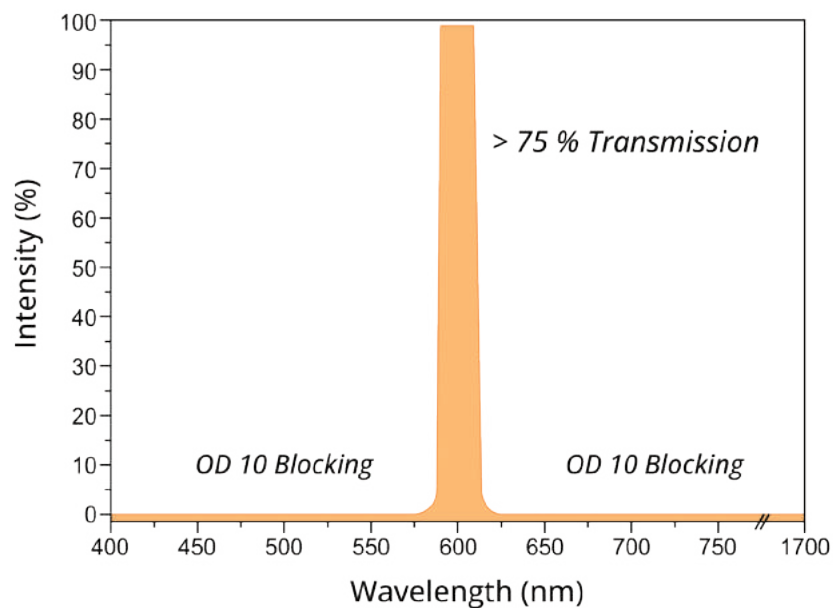

Wavelength Selection Guide

Poly-RED

FWHM	CWL	UV	VIS	IR	SWIR	CUSTOM
2 - 15	255 - 290					
	280 - 310	●				
	310 - 350	●				
	348 - 390	●				
	385 - 435					
	430 - 490		●			
	485 - 550		●			
	545 - 620		●			
	615 - 700		●			
3 - 15	690 - 790		●			
	775 - 890			●		
5 - 15	880 - 1015			●		
	1000 - 1150			●		
	1140 - 1310				●	
	1300 - 1500				●	
7 - 13	1475 - 1700				●	

* Units : nm

Poly-BLUE

FWHM	CWL	UV	VIS	IR	SWIR	CUSTOM
10 or 20 (nominal)	255 - 290					
	280 - 310	●				
	310 - 350	●				
	348 - 390	●				
	385 - 435					
	430 - 490		●			
	485 - 550		●			
	545 - 620		●			
	615 - 700		●			
	690 - 790		●			
	775 - 890			●		
	880 - 1015			●		
	1000 - 1150			●		
	1140 - 1310				●	
	1300 - 1500				●	
	1475 - 1700				●	

* Units : nm

Aperture size

Poly-A5	5 mm	Suitable for supercontinuum lasers
Poly-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

Flexible Wavelength Selector – Mono

FWS-Mono features complete software control of wavelength and bandwidth via a USB link and simple software interface.



Model	CWL (nm)	FWHM (nm)
Mono-F00	255 - 290	2 - 15
Mono-F01	280 - 310	2 - 15
Mono-F02	310 - 350	2 - 15
Mono-F03	348 - 390	2 - 15
Mono-F04	385 - 435	2 - 15
Mono-F05	430 - 490	2 - 15
Mono-F06	485 - 550	2 - 15
Mono-F07	545 - 620	2 - 15
Mono-F08	615 - 700	2 - 15
Mono-F09	690 - 790	3 - 15
Mono-F10	775 - 890	3 - 15
Mono-F11	880 - 1015	5 - 15
Mono-F12	1000 - 1150	5 - 15
Mono-F13	1140 - 1310	5 - 15
Mono-F14	1300 - 1500	5 - 15
Mono-F15	1475 - 1700	7 - 13



* Center Wavelength tuning range can vary by a few nanometers depending on the product.

* Minimum step size of center wavelength : 1 nm

* Step size of bandwidth (FWHM) : 1 nm


Aperture size

Mono-A5	5 mm	Suitable for supercontinuum lasers
Mono-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

* For optimal performance input light source must be collimated

Full Specifications



	Mono-A5	Mono-A10
Spectral range (nm)	255 - 1700	255 - 1700
Bandwidth (FWHM) (nm)	2 - 15 (nominal)	2 - 15 (nominal)
Aperture size (mm)	5	10
Out of band blocking	OD 10 in tuning range, OD 5 in spectral range up to 1700 nm	
Step size of center wavelength (nm)	1.0	
Step size of bandwidth (FWHM) (nm)	1.0	
Wavelength accuracy (nm) : CWL, FWHM	< 1 nm	
Damage threshold	Peak Fluence < 1.75 Joules/cm ² (~70 spot diam., 10 ns pulse, 10 Hz repetition rate, 532 nm LASER) CW (Continuous wave) Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM . 10 nm)	
Scanning speed (ms)	20 - 200 ms (depending on step size)	
Software version	FWS-Auto ver 3.1	
Dimension (L x W x H, mm)	48 x 92 x 64	
Input power	DC 12 V, 5 A	
Electrical requirement	AC 100 - 240 V, 50/60 Hz	
Data interface	USB 2.0	
Weight (kg)	0.4	

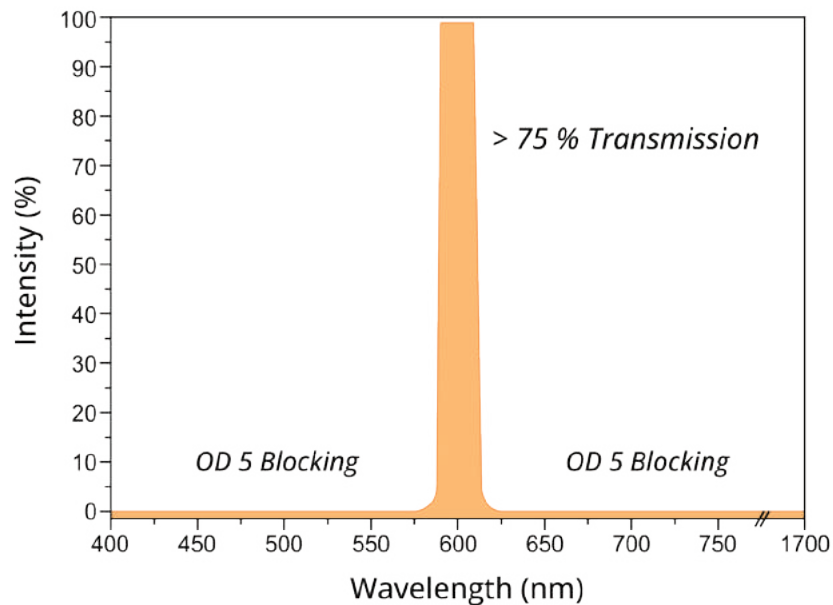



Poly, Mono Software

Software Control


Set

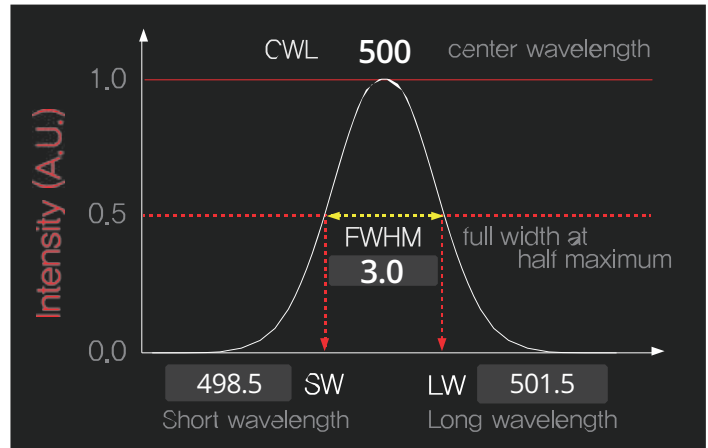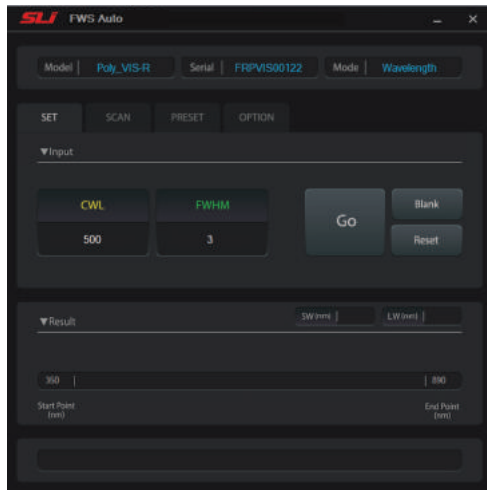

Scan

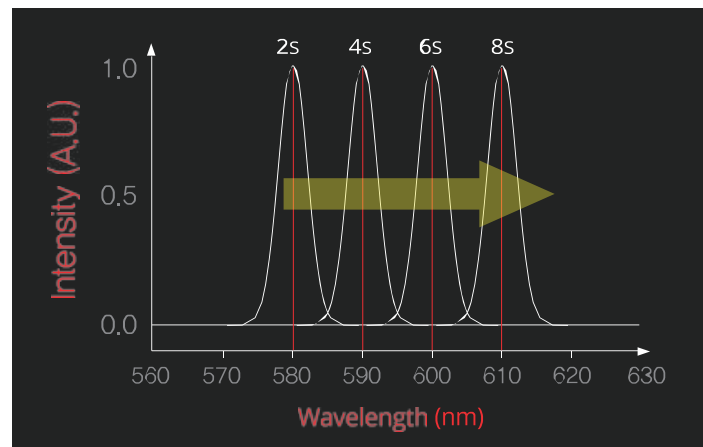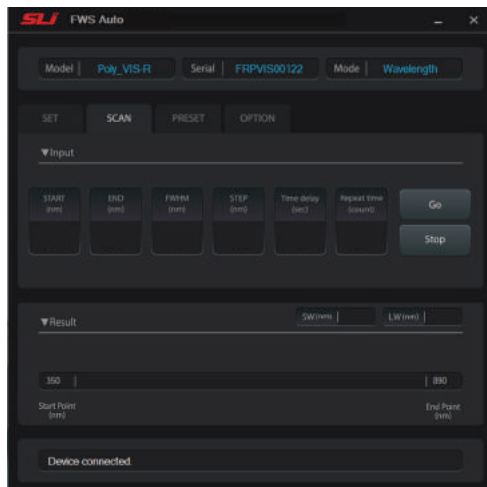

Software Compatibility

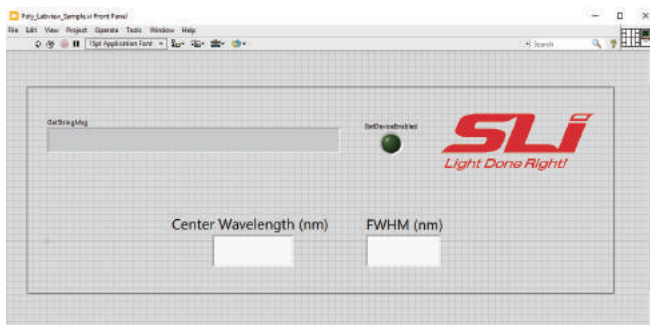


- Applying SDK of FWS to a Labview software (uploaded on the website)
- Compatible with various softwares (LabVIEW, Python, MATLAB)

Flexible Wavelength Selector – Auto Application

Wavelength tuning for broadband light sources

Flexible Wavelength Selector (FWS) can be applied with various types of light sources, such as supercontinuum laser, plasma light, LED, Xenon lamp and so on. FWS can provide the tunability on the light sources used in a user's system.

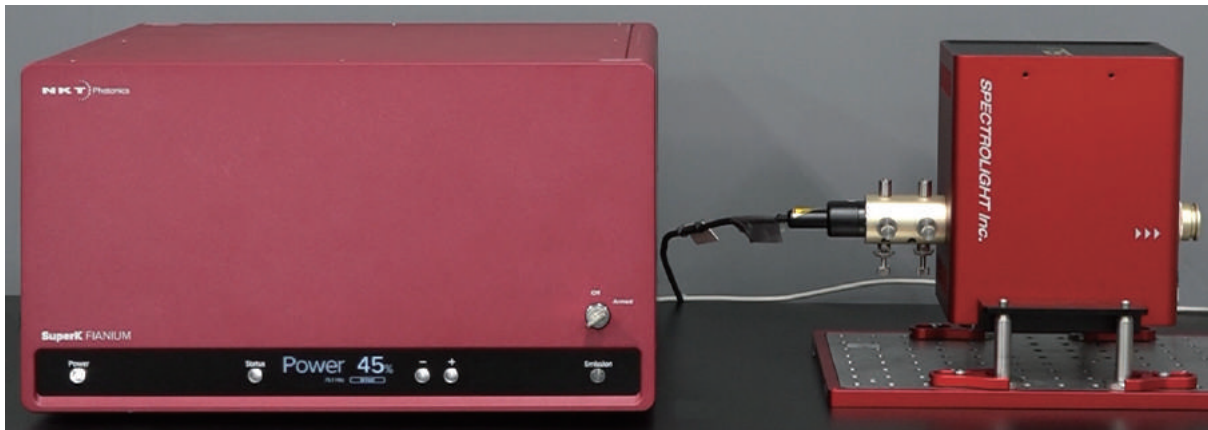

FWS-Poly + Supercontinuum laser

- Applications with various light sources
 - Supercontinuum lasers (Spectrolight, NKT, LEUKOS etc.)
 - Laser-Driven Light Source (Energetiq, ISTEQ, etc.)
 - LED, Xenon lamp, Halogen lamp and other broadband light sources





FWS-Poly + Laser-Driven Light Source

Flexible Wavelength Selector - Auto

Application

Detection for spectroscopy and microscopy

Experimental setup and scheme for fluorescence microscope

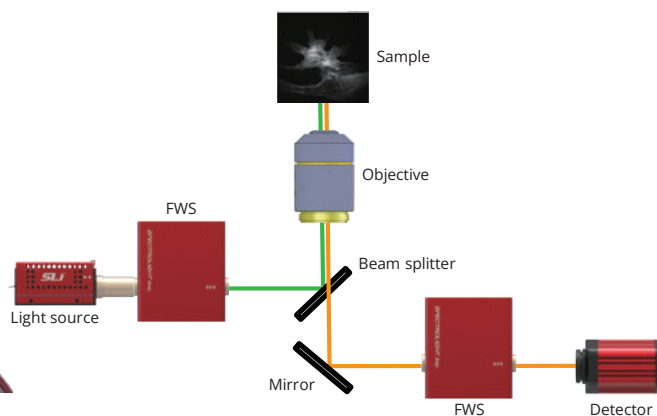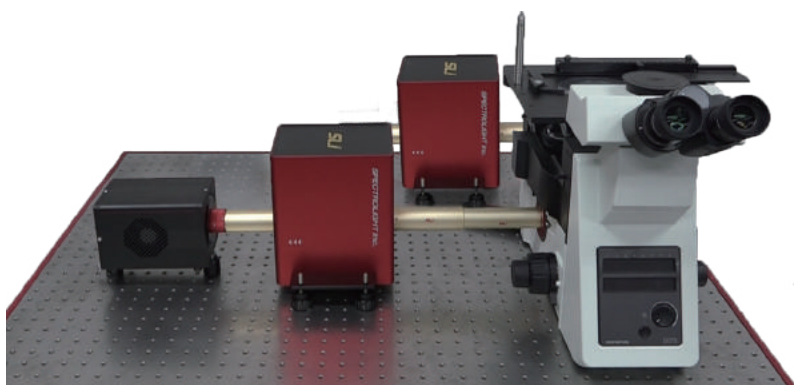

Fluorescence imaging results

It is possible to convert a commercial microscope into a Fluorescence imaging microscope by applying our FWS on the emission/excitation port of the microscope.



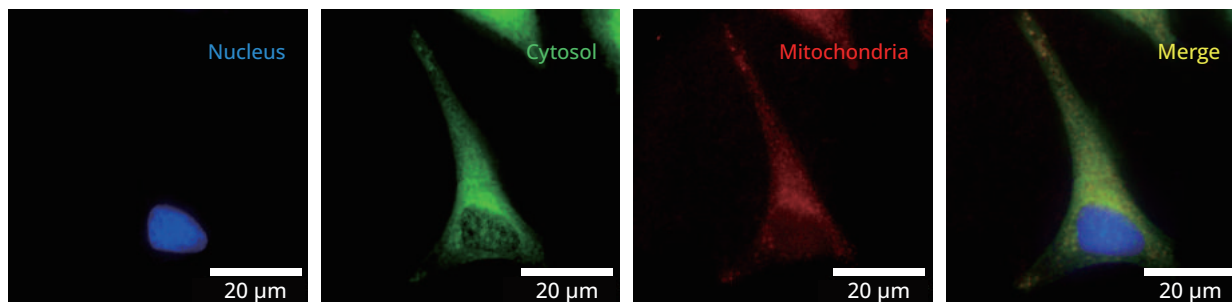



Figure 1. HeLa cells labelled with Dapi and Deep Red and CMFDA green show localization of Nucleus and mitochondria and cytosol. The images were captured using a microscope equipped with X60 objective lens.

Hyperspectral Camera

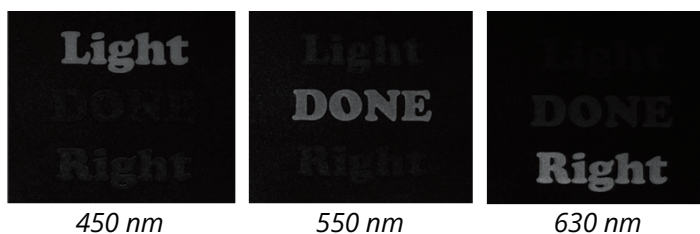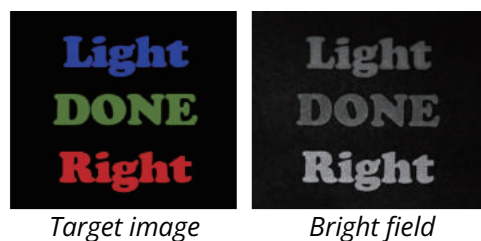

Flexible Wavelength Selector – Basic

Model	CWL (nm)	FWHM (nm)
Basic-F00	255 - 290	2 - 15
Basic-F01	280 - 310	2 - 15
Basic-F02	310 - 350	2 - 15
Basic-F03	348 - 390	2 - 15
Basic-F04	385 - 435	2 - 15
Basic-F05	430 - 490	2 - 15
Basic-F06	485 - 550	2 - 15
Basic-F07	545 - 620	2 - 15
Basic-F08	615 - 700	2 - 15
Basic-F09	690 - 790	3 - 15
Basic-F10	775 - 890	3 - 15
Basic-F11	880 - 1015	5 - 15
Basic-F12	1000 - 1150	5 - 15
Basic-F13	1140 - 1310	5 - 15
Basic-F14	1300 - 1500	5 - 15
Basic-F15	1475 - 1700	7 - 13

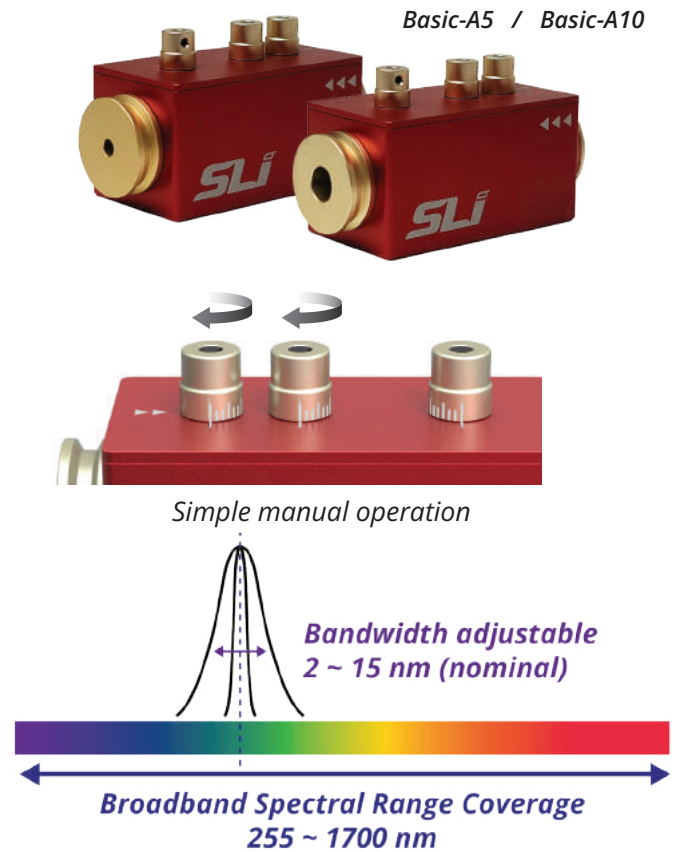

* Center Wavelength tuning range can vary by a few nanometers depending on the product.
Minimum step size of center wavelength : 1 nm / Step size of bandwidth (FWHM) : 1 nm

Aperture size

Basic-A5	5 mm	Suitable for supercontinuum lasers
Basic-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)


* For optimal performance input light source must be collimated

* Manual models require a spectrometer for operation


	Basic-A5	Basic-A10
Spectral range (nm)	255 - 1700	255 - 1700
Bandwidth (FWHM) (nm)	2 - 15 (nominal)	2 - 15 (nominal)
Aperture size (mm)	5	10
Out of band blocking	OD 10 in tuning range, OD 5 in spectral range up to 1700 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM . 10 nm)	
Dimension (L x W x H, mm)	48 x 92 x 64	
Weight (kg)	0.2	

Flexible Wavelength Selector – High Resolution

Model	CWL (nm)	FWHM (nm)
High Resolution-F00	255 - 290	2 - 15
High Resolution-F01	280 - 310	2 - 15
High Resolution-F02	310 - 350	2 - 15
High Resolution-F03	348 - 390	2 - 15
High Resolution-F04	385 - 435	2 - 15
High Resolution-F05	430 - 490	2 - 15
High Resolution-F06	485 - 550	2 - 15
High Resolution-F07	545 - 620	2 - 15
High Resolution-F08	615 - 700	2 - 15
High Resolution-F09	690 - 790	3 - 15
High Resolution-F10	775 - 890	3 - 15
High Resolution-F11	880 - 1015	5 - 15
High Resolution-F12	1000 - 1150	5 - 15
High Resolution-F13	1140 - 1310	5 - 15
High Resolution-F14	1300 - 1500	5 - 15
High Resolution-F15	1475 - 1700	7 - 13

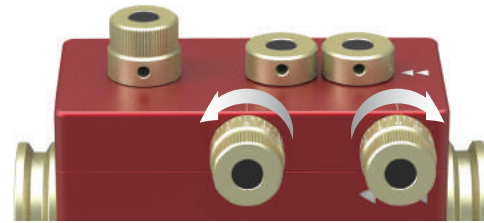

Simple yet precise manual operation

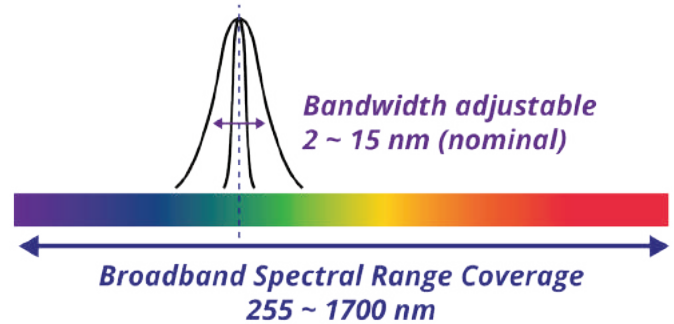

* Center Wavelength tuning range can vary by a few nanometers depending on the product.

Minimum step size of center wavelength : 1 nm / Step size of bandwidth (FWHM) : 1 nm

Aperture size

High Resolution-A5	5 mm	Suitable for supercontinuum lasers
High Resolution-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)


* For optimal performance input light source must be collimated

* Manual models require a spectrometer for operation

	High Resolution-A5	High Resolution-A10
Spectral range (nm)	255 - 1700	255 - 1700
Bandwidth (FWHM) (nm)	2 - 15 (nominal)	2 - 15 (nominal)
Aperture size (mm)	5	10
Out of band blocking	OD 10 in tuning range, OD 5 in spectral range up to 1700 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM . 10 nm)	
Dimension (L x W x H, mm)	40 X 76 X 50	
Weight (kg)	0.3	

Flexible Wavelength Selector – CenterLine

Model	CWL (nm)	FWHM (nm)
CenterLine-F00	255 - 290	10 or 20 (nominal)
CenterLine-F01	280 - 310	10 or 20 (nominal)
CenterLine-F02	310 - 350	10 or 20 (nominal)
CenterLine-F03	348 - 390	10 or 20 (nominal)
CenterLine-F04	385 - 435	10 or 20 (nominal)
CenterLine-F05	430 - 490	10 or 20 (nominal)
CenterLine-F06	485 - 550	10 or 20 (nominal)
CenterLine-F07	545 - 620	10 or 20 (nominal)
CenterLine-F08	615 - 700	10 or 20 (nominal)
CenterLine-F09	690 - 790	10 or 20 (nominal)
CenterLine-F10	775 - 890	10 or 20 (nominal)
CenterLine-F11	880 - 1015	10 or 20 (nominal)
CenterLine-F12	1000 - 1150	10 or 20 (nominal)
CenterLine-F13	1140 - 1310	10 or 20 (nominal)
CenterLine-F14	1300 - 1500	10 or 20 (nominal)
CenterLine-F15	1475 - 1700	10 or 20 (nominal)

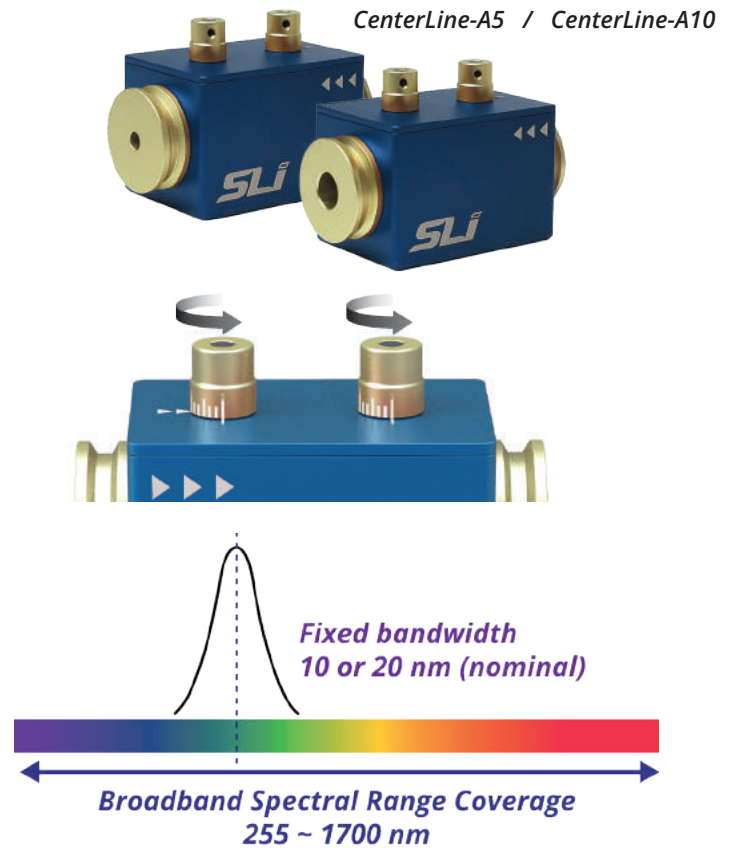

* Center Wavelength tuning range can vary by a few nanometers depending on the product.
Minimum step size of center wavelength : 1 nm

Aperture size


CenterLine-A5	5 mm	Suitable for supercontinuum lasers
CenterLine-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

* For optimal performance input light source must be collimated
* Manual models require a spectrometer for operation

	CenterLine-A5	CenterLine-A10
Spectral range (nm)	255 - 1700	255 - 1700
Bandwidth (FWHM) (nm)	20 (nominal)	20 (nominal)
Aperture size (mm)	5	10
Out of band blocking	OD 5 up to 1700 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM . 10 nm)	
Dimension (L x W x H, mm)	40 x 58 x 40	
Weight (kg)	0.2	

Custom Wavelength Selector - CWS

Model	CWL (nm)	FWHM (nm)
CWS-F00	255 - 290	2 - 15
CWS-F01	280 - 310	2 - 15
CWS-F02	310 - 350	2 - 15
CWS-F03	348 - 390	2 - 15
CWS-F04	385 - 435	2 - 15
CWS-F05	430 - 490	2 - 15
CWS-F06	485 - 550	2 - 15
CWS-F07	545 - 620	2 - 15
CWS-F08	615 - 700	2 - 15
CWS-F09	690 - 790	3 - 15
CWS-F10	775 - 890	3 - 15
CWS-F11	880 - 1015	5 - 15
CWS-F12	1000 - 1150	5 - 15
CWS-F13	1140 - 1310	5 - 15
CWS-F14	1300 - 1500	5 - 15
CWS-F15	1475 - 1700	7 - 13

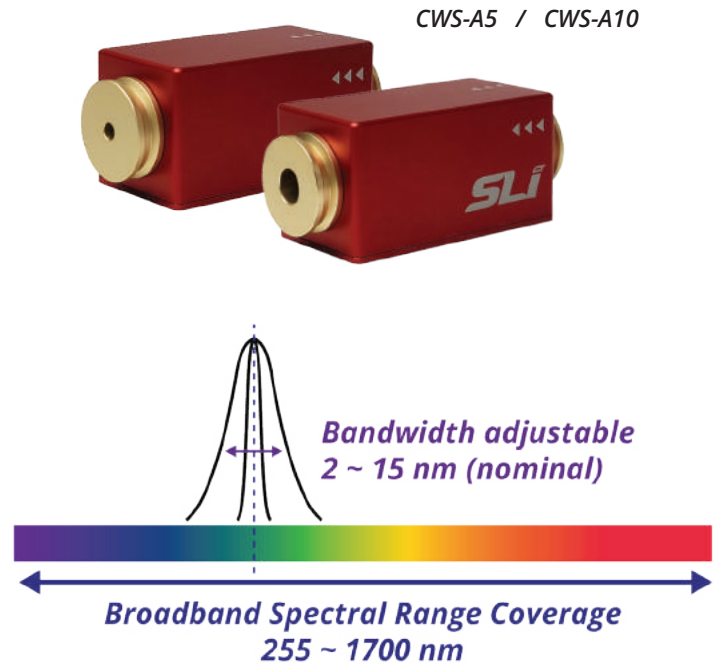

* User specified single wavelength and bandwidth

* CWS can be shipped within 72 hours

Aperture size

CWS-A5	5 mm	Suitable for supercontinuum lasers
CWS-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

* For optimal performance input light source must be collimated

* Manual models require a spectrometer for operation

	CWS-A5	CWS-A10
Spectral range (nm)	255 - 1700 (single wavelength)	255 - 1700 (single wavelength)
Bandwidth (FWHM) (nm)	2 - 15 (single bandwidth)	2 - 15 (single bandwidth)
Aperture size (mm)	5	10
Out of band blocking	OD 10 in tuning range, OD 5 in spectral range up to 1700 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM . 10 nm)	
Dimension (L x W x H, mm)	40 x 76 x 40	
Weight (kg)	0.2	

Tunable Bandpass Filter

Integration with various systems

Hyperspectral Imaging




Detection camera + Tunable bandpass filter

Fluorescence Microscopy



Extender accessory between a microscope and tunable bandpass filter and camera for imaging

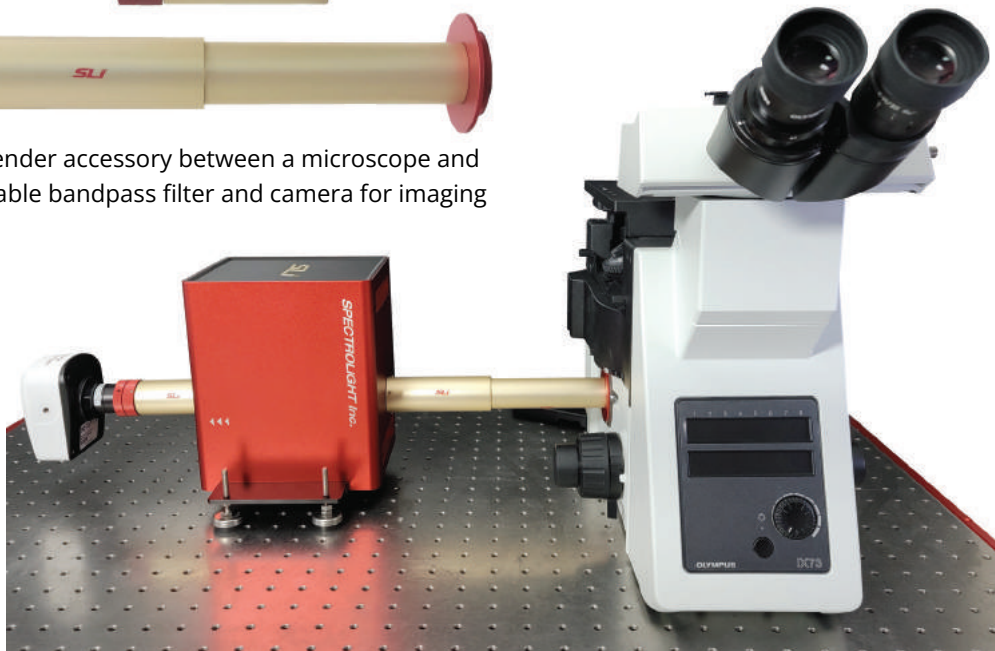

Tunable Bandpass Filter Accessories

Input / Output Linker

There are various selections of accessories available, including input and output linkers, extenders and mounting bases for Tunable Bandpass filters.

Input and Output Linkers

Input and output linkers allow the connection of Tunable Bandpass filters to other light sources, detectors, etc.

Input Linker



WS-FA-11P
WS-FA-05P


Output Linker



WS-SMA

Fiber collimator adapter

To connect tunable bandpass filters with fiber collimators [Φ 11 mm, SM05]

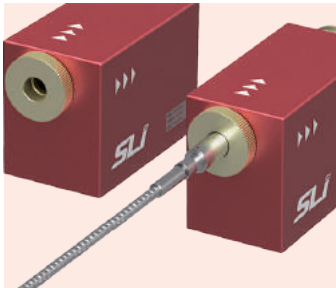


SMA type fiber adapter

To connect the output of tunable bandpass filters directly to an SMA type



Supercontinuum source adapter

To connect supercontinuum sources to tunable bandpass filters

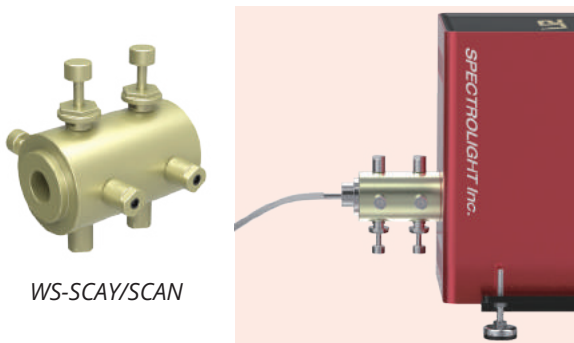

WS-SCAY/SCAN

Light guide adapter

To connect the output of tunable bandpass filters directly to light guide [3 mm, 5 mm]



WS-LLG3/LLG5

Tunable Bandpass Filter Accessories

Extender for detection, Mounting Base

The Extender for detection helps connect the Tunable Bandpass filters to the detector, and the Mounting base mounts helps adjust the height of the Tunable Bandpass filter.

| Extender for detection, Mounting Base

Extender for detection



Mounting Base




4f Relay Extender



Application Idea

Allowing easy connection of FWS with commercial microscope

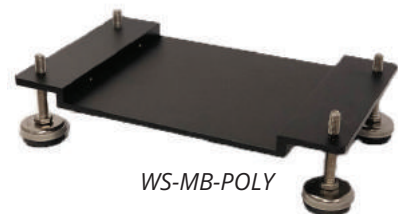

WS-MB-POLY

Mounting Base

Magnetic baseplate includes an M4 center hole for simple plug & play post mounting of wavelength selectors

TUNABLE LASER SYSTEMS



- One box PLUG&PLAY Tunable Laser Systems
- Easy, Effective and Reliable applications
- Fully Customizable to meet all your requirements

Tunable Laser System (TLS)

Fully tunable pico-second pulsed laser system by Spectrolight

Spectrolight's tunable laser system (TLS) is an innovative, continuously tunable laser that combines a supercontinuum laser and a tunable bandpass filter in VISBLE, IR, and SWIR ranges.

TLS-RED can generate wide wavelength ranges of approximately 400 nm to 1700 nm and can control the FWHM 2 to 15 nm (nominal), and **TLS-BLUE** has the same wide wavelength ranges with fixed FWHM at 10 or 20 nm. TLS-RED is suitable for fields that require precise scanning, and TLS-BLUE is ideal for fields that require high output. By using Spectrolight's TLS, users can freely select the output power and wavelength ranges according to their needs.

TLS is a picosecond tunable laser that can be applied to various fields, from fluorescence microscopy to time-resolved spectroscopy, such as TCSPC, Hyperspectral imaging, Machine vision, Semiconductors, Sensors, and other applications. .




TLS-RED (Tunable bandwidth)




TLS-BLUE (Fixed bandwidth)

Output power of TLS

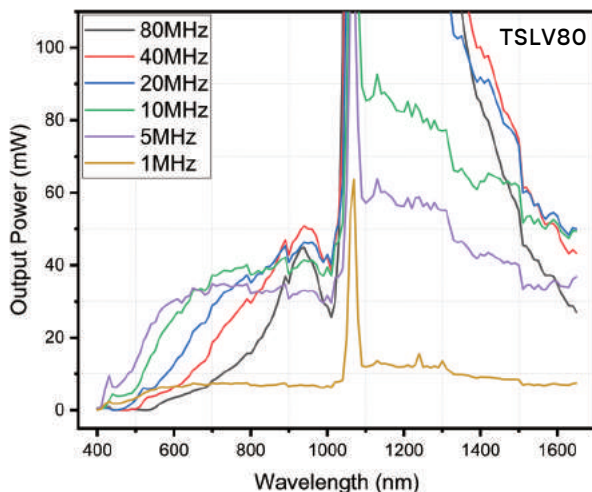

* Measured at 15 nm bandwidth (FWHM)

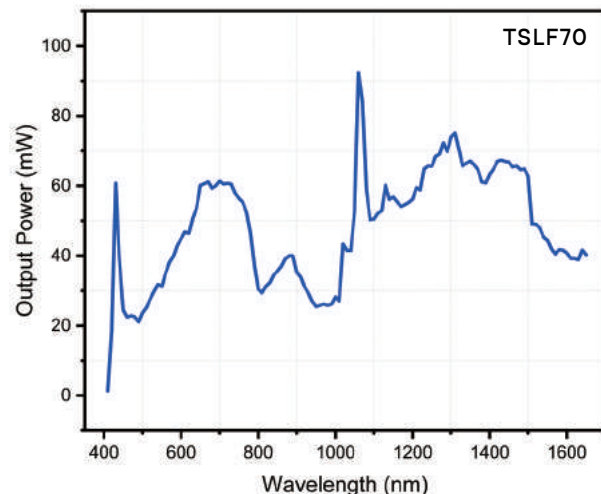

TLS-RED



Each TLS-Red model can cover different spectral ranges from 410 to 1700 nm. The FWHM bandwidth of TLS-Red is tunable from 2nm to 15nm (nominal). The exact tunable bandwidth depends on the wavelength range. Users can select laser types and variable wavelength ranges according to the user's applications. Please refer to the detailed specifications table below.

General Specifications

Tunable Laser System (TLS-RED) : Each TLS has VIS, IR, SWIR and Custom wavelength selection

Model	Supercontinuum output power		Repetition Rate	Fundamental pulse width (ps)	Output pulse width (ps)	Tuning Range (nm)	Bandwidth (FWHM) (nm)
	Visible	Total					
TSLF10-RED	100 mW	1 W	5 MHz	~ 100 ps	< 300 ps	450 - 1700 nm	2 - 15 nm (nominal)
TSLF15-RED	500 mW	1.5 W	20 MHz	~ 6 ps	< 50 ps	410 - 1700 nm	
TSLV80-RED	1 W	8 W	0.01 to 200 MHz	~ 100 ps	< 300 ps	430 - 1700 nm	
TSLF70-RED	2 W	7 W	80 MHz	~ 6 ps	< 50 ps	410 - 1700 nm	

Detailed Specifications

Item	Laser Specifications	Optical Specifications
TSLF10-RED-VIS	Wavelength : 450 - 2400 nm Output power : 1 W VIS power : 0.1 W Repetition rate : 5 MHz	Tunable CWL : 450 - 790 nm FWHM : 2 - 15 nm (450 - 700 nm), 3 - 15 nm (701 - 790 nm)
TSLF10-RED-IR		Tunable CWL : 775 - 1150 nm FWHM : 3 - 15 nm (775 - 890 nm), 5 - 15 nm (891 - 1150 nm)
TSLF10-RED-SWIR		Tunable CWL : 1140 - 1700 nm FWHM : 5 - 15 nm (1140 - 1500 nm), 7 - 13 nm (1501 - 1700 nm)
TSLF15-RED-VIS	Wavelength : 410 - 2400 nm Output power : 1.5 W VIS power : 0.5 W Repetition rate : 20 MHz	Tunable CWL : 410 - 790 nm FWHM : 2 - 15 nm (410 - 700 nm), 3 - 15 nm (701 - 790 nm)
TSLF15-RED-IR		Tunable CWL : 775 - 1150 nm FWHM : 3 - 15 nm (775 - 890 nm), 5 - 15 nm (891 - 1150 nm)
TSLF15-RED-SWIR		Tunable CWL : 1140 - 1700 nm FWHM : 5 - 15 nm (1140 - 1500 nm), 7 - 13 nm (1501 - 1700 nm)
TSLV80-RED-VIS	Wavelength : 430 - 2400 nm Output power : 8 W VIS power : 1 W Repetition rate : 0.01 - 200 MHz adjustable	Tunable CWL : 430 - 790 nm FWHM : 2 - 15 nm (430 - 700 nm), 3 - 15 nm (701 - 790 nm)
TSLV80-RED-IR		Tunable CWL : 775 - 1150 nm FWHM : 3 - 15 nm (775 - 890 nm), 5 - 15 nm (891 - 1150 nm)
TSLV80-RED-SWIR		Tunable CWL : 1140 - 1700 nm FWHM : 5 - 15 nm (1140 - 1500 nm), 7 - 13 nm (1501 - 1700 nm)
TSLF70-RED-VIS	Wavelength : 410 - 2400 nm Output power : 7 W VIS power : 2 W Repetition rate : 80 MHz	Tunable CWL : 410 - 790 nm FWHM : 2 - 15 nm (410 - 700 nm), 3 - 15 nm (701 - 790 nm)
TSLF70-RED-IR		Tunable CWL : 775 - 1150 nm FWHM : 3 - 15 nm (775 - 890 nm), 5 - 15 nm (891 - 1150 nm)
TSLF70-RED-SWIR		Tunable CWL : 1140 - 1700 nm FWHM : 5 - 15 nm (1140 - 1500 nm), 7 - 13 nm (1501 - 1700 nm)

For the Custom models, users can select a supercontinuum laser model and variable wavelength ranges according to the user's applications. Please refer to the table below for supercontinuum laser models and wavelength ranges. For example, if the user selects the supercontinuum laser model as SLF10 and the wavelength range of 690 – 1310 nm, then the model name of the TLS will be TSLF10-RED-Custom (690 -1310 nm).

The supercontinuum laser model table

SL-Pico: Supercontinuum laser

Model	Supercontinuum output power		Repetition Rate	Fundamental pulse width (ps)	Output pulse width (ps)	Spectral Range (nm)
	Visible	Total				
SLF10	100 mW	1 W	5 MHz	~ 100 ps	< 300 ps	450 - 2400 nm
SLF15	500 mW	1.5 W	20 MHz	~ 6 ps	< 50 ps	410 - 2400 nm
SLV80	1 W	8 W	0.01 to 200 MHz	~ 100 ps	< 300 ps	430 - 2400 nm
SLF70	2 W	7 W	80 MHz	~ 6 ps	< 50 ps	410 - 2400 nm

Wavelength range table

User specified custom wavelength range selectable from 410 - 1700 nm (nominal)

FWHM	2-15					3-15		5-15				7-13
CWL	410 - 435	430 - 490	485 - 550	545 - 620	615 - 700	690 - 790	775 - 890	880 - 1015	1000 - 1150	1140 - 1310	1300 - 1500	1475 - 1700



TLS-RED (Tunable bandwidth)

TLS-BLUE

Each TLS-Red model can cover different spectral ranges from 410 to 1700 nm. The FWHM bandwidth of TLS-Blue is fixed at either 10 or 20 nm (nominal). Users can select laser types and variable wavelength ranges according to the user's applications. Please refer to the detailed specifications table below.

General Specifications

Tunable Laser System (TLS-BLUE): Each TLS has VIS, IR, SWIR and Custom wavelength selection

Model	Supercontinuum output power		Repetition Rate	Fundamental pulse width (ps)	Output pulse width (ps)	Tuning Range (nm)	Bandwidth (FWHM) (nm)
	Visible	Total					
TSLF10-BLUE	100 mW	1 W	5 MHz	~ 100 ps	< 300 ps	450 - 1700 nm	Fixed 10 or 20 nm (nominal)
TSLF15-BLUE	500 mW	1.5 W	20 MHz	~ 6 ps	< 50 ps	410 - 1700 nm	
TSLV80-BLUE	1 W	8 W	0.01 to 200 MHz	~ 100 ps	< 300 ps	430 - 1700 nm	
TSLF70-BLUE	2 W	7 W	80 MHz	~ 6 ps	< 50 ps	410 - 1700 nm	

Detailed Specifications

Item	Laser Specifications	Optical Specifications
TSLF10-BLUE-VIS	Wavelength : 450 - 2400 nm Output power : 1 W VIS power : 0.1 W Repetition rate : 5 MHz	Tunable CWL : 450 - 790 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF10-BLUE-IR		Tunable CWL : 775 - 1150 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF10-BLUE-SWIR		Tunable CWL : 1140 - 1700 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF15-BLUE-VIS	Wavelength : 410 - 2400 nm Output power : 1.5 W VIS power : 0.5 W Repetition rate : 20 MHz	Tunable CWL : 410 - 790 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF15-BLUE-IR		Tunable CWL : 775 - 1150 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF15-BLUE-SWIR		Tunable CWL : 1140 - 1700 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLV80-BLUE-VIS	Wavelength : 430 - 2400 nm Output power : 8 W VIS power : 1 W Repetition rate : 0.01 - 200 MHz adjustable	Tunable CWL : 430 - 790 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLV80-BLUE-IR		Tunable CWL : 775 - 1150 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLV80-BLUE-SWIR		Tunable CWL : 1140 - 1700 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF70-BLUE-VIS	Wavelength : 410 - 2400 nm Output power : 7 W VIS power : 2 W Repetition rate : 80 MHz	Tunable CWL : 410 - 790 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF70-BLUE-IR		Tunable CWL : 775 - 1150 nm Fixed FWHM : 10 or 20 nm (nominal)
TSLF70-BLUE-SWIR		Tunable CWL : 1140 - 1700 nm Fixed FWHM : 10 or 20 nm (nominal)

For the Custom models, users can select a supercontinuum laser model and variable wavelength ranges according to the user's applications. Please refer to the table below for supercontinuum laser models and wavelength ranges. For example, if the user selects the supercontinuum laser model as SLF10 and the wavelength range of 690 – 1310 nm, then the model name of the TLS will be TSLF10-BLUE-Custom (690 -1310 nm).

The supercontinuum laser model table


SL-Pico: Supercontinuum laser

Model	Supercontinuum output power		Repetition Rate	Fundamental pulse width (ps)	Output pulse width (ps)	Spectral Range (nm)
	Visible	Total				
SLF10	100 mW	1 W	5 MHz	~ 100 ps	< 300 ps	450 - 2400 nm
SLF15	500 mW	1.5 W	20 MHz	~ 6 ps	< 50 ps	410 - 2400 nm
SLV80	1 W	8 W	0.01 to 200 MHz	~ 100 ps	< 300 ps	430 - 2400 nm
SLF70	2 W	7 W	80 MHz	~ 6 ps	< 50 ps	410 - 2400 nm

Wavelength range table

User specified custom wavelength range selectable from 410 - 1700 nm (nominal)

FWHM	Fixed 10 or 20 (nominal)											
CWL	410 - 435	430 - 490	485 - 550	545 - 620	615 - 700	690 - 790	775 - 890	880 - 1015	1000 - 1150	1140 - 1310	1300 - 1500	1475 - 1700

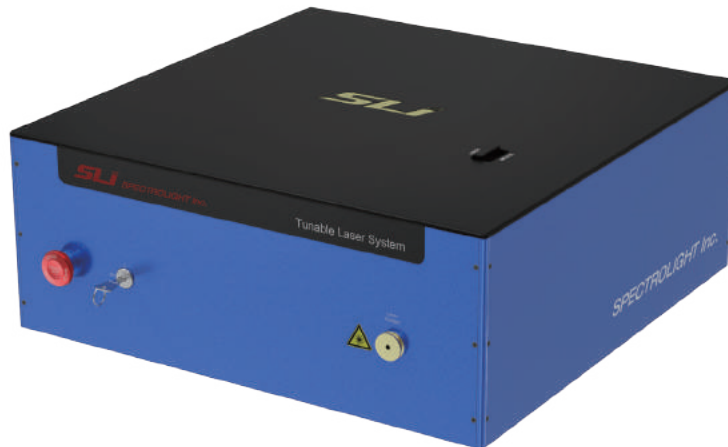

TLS-BLUE (Fixed bandwidth)

Full Specifications

		TSLF10-RED	TSLF15-RED	TSLF70-RED	TSLV80-RED	TSLF10-BLUE	TSLF15-BLUE	TSLF70-BLUE	TSLV80-BLUE
Output power	Visible	100 mW	500 mW	2 W	1 W	100 mW	500 mW	2 W	1 W
	Total	1 W	1.5 W	7 W	8 W	1 W	1.5 W	7 W	8 W
Repetition Rate		5 MHz	20 MHz	80 MHz	0.01 to 200 MHz adjustable	5 MHz	20 MHz	80 MHz	0.01 to 200 MHz adjustable
Fundamental pulse width		~ 100 ps	~ 6 ps	~ 6 ps	~ 100 ps	~ 100 ps	~ 6 ps	~ 6 ps	~ 100 ps
Output pulse width		< 300 ps	< 50 ps	< 50 ps	< 300 ps	< 300 ps	< 50 ps	< 50 ps	< 300 ps
Tuning Range		450-1700 nm	410-1700 nm	410-1700 nm	430-1700 nm	450-1700 nm	410-1700 nm	410-1700 nm	430-1700 nm
FWHM Range		2-15 nm (nominal)				Fixed 10 or 20 nm			
Power stability		< 1 %							
Sync(trigger) Output		(Optional) NIM Output 0 - (-1) V or TTL Output 0 - 3.3 V							
Beam diameter and quality		~ 2 mm@633 nm; M2<1.1							
Beam divergence (Half angle)		< 1 mrad							
State of polarization		Unpolarized							
Length of output fiber		1.5 m							
Software		TLS ver.2							
Dimension (L x W x H, mm)		584.3 x 583.6 x 246							
Input power		AC 100 - 240 V, 50/60 Hz							
Data interface		USB 2.0							

TUNABLE LIGHT SOURCES



- Award Winning Tunable Light Source
- Wide and Precise Spectral Wavelength Selection
- Wide Applications in both Scientific and Industrial fields



Tunable Mighty Light (TML)

Fully tunable high power light source

Tunable Mighty Light (TML) is an innovative tunable light source that delivers a wide tunable spectral range of 430 - 700 nm. TML combines a powerful broadband light source, together with Spectrolight's very own tunable bandpass filter within a compact automatic device to provide effortless tuning of light.

TML-LED Specifications


- High power collimated white light source
- Tunable spectral wavelength : 430 - 700 nm
- FWHM : < 30 nm
- Visible power : < 3 W
- Color temperature : 7500 K
- Lamp power consumption : 300 W
- LED lifetime : ~ 50,000 hours
- Dimensions : 374 x 292 x 243 mm
- Power control : Software control (0 - 100 %)
- Electrical requirements : AC 100 - 240 V, 50/60 Hz

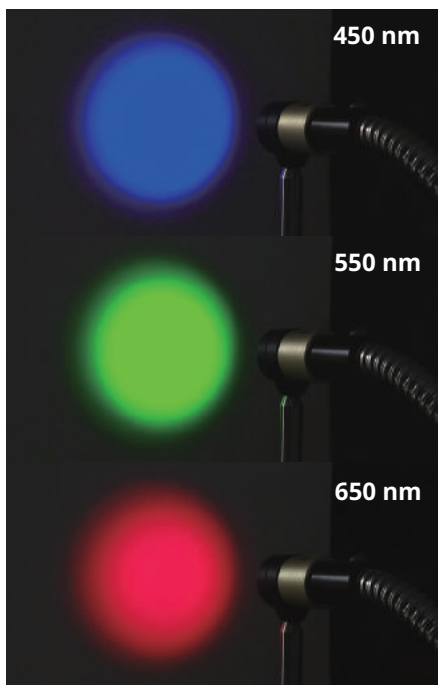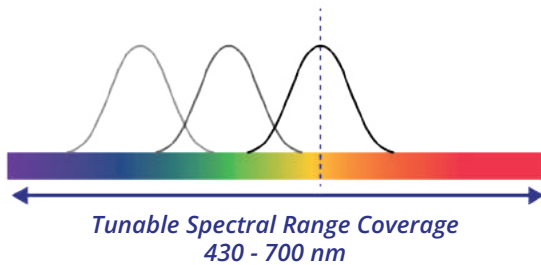


TML Output results in the visible range



U.S Patent No. 18/158,861

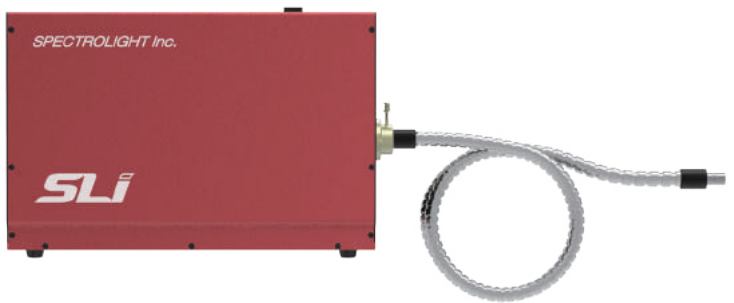

* Fiber bundle included with light source

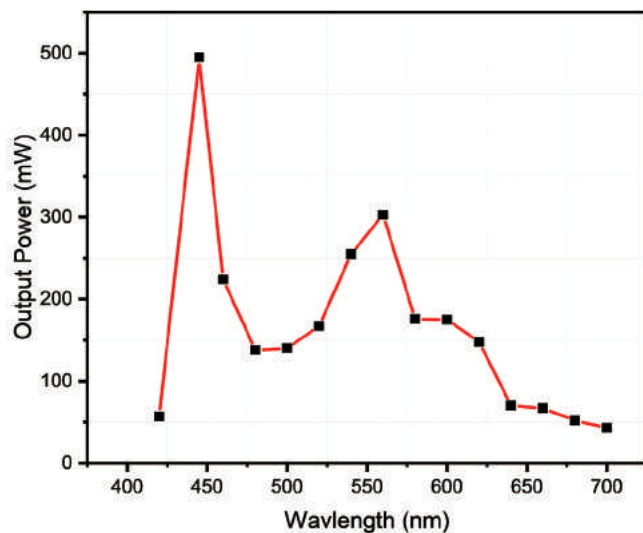

Output power of TML

LIGHT SOURCES



- Powerful and Compact Broadband Light Sources
- Pico-second Pulsed Supercontinuum Lasers / Tungsten-Halogen / Plasma / LED
- For the Most Advanced Illumination Applications
(Microscopy, Spectroscopy, Machine Vision and Spectral Imaging applications)

Mighty Light – Tungsten Halogen (ML-TH)

A compact source of low-noise white light with versatile output modules


ML-TH integrates a Tungsten Halogen bulb and power supply with a control board that delivers uniquely low-noise output. By applying a series of pre-aligned bolt-on accessories, ML-TH can be directly coupled into a microscope and fiber bundle with its light beam homogenized and collimated. ML-TH can also be integrated with our unique Wavelength Selector devices to create a tunable monochromatic beam.

| Specifications


- Type of lamp : Tungsten Halogen
- Spectral wavelength : 350 - 2500 nm
- Lamp power consumption : 12 W
- Power stability : < 0.5 %
- Bulb lifetime : ~ 500 hours
- Color temperature : 2,900 K
- Dimensions : 125 x 75 x 70 mm
- Power supply : DC 9 V at 2 A
- Electric requirement : AC 100 - 240 V, 50/60 Hz



| Features

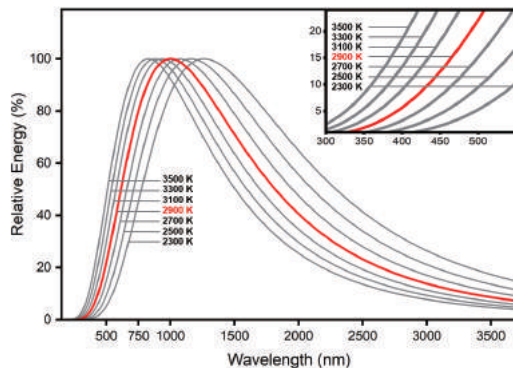

Broad output spectrum

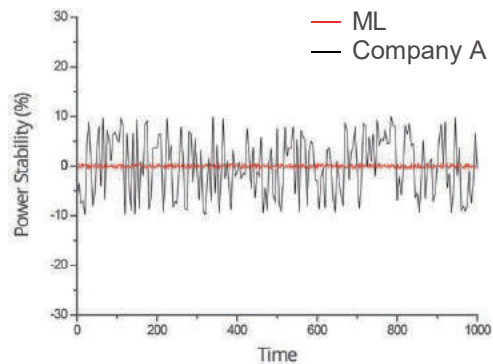

Low power fluctuation (High stability) : < 0.5 %


Collimated light




Collimated



Collimated (magnified)



Circle Pattern




Line Pattern

Uniform intensity when collimated

Mighty Light – Tungsten Halogen (ML-TH) ***Application***

Broadband tunable light source

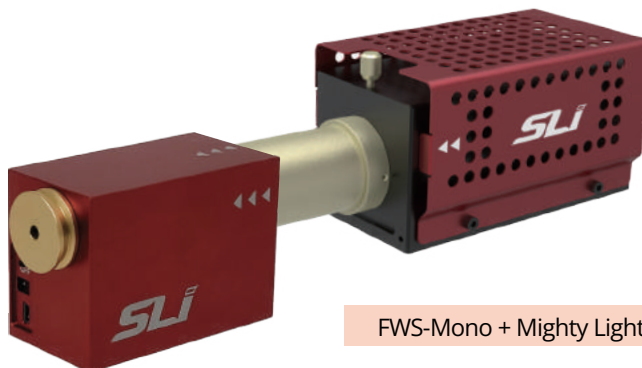

FWS-Mono + Mighty Light


- Applicable to Flexible Wavelength Selector
- Creates a tunable monochromatic beam
- Homogenizes and collimates emitted light beam

Free space



Collimator adaptor

Fiber coupling

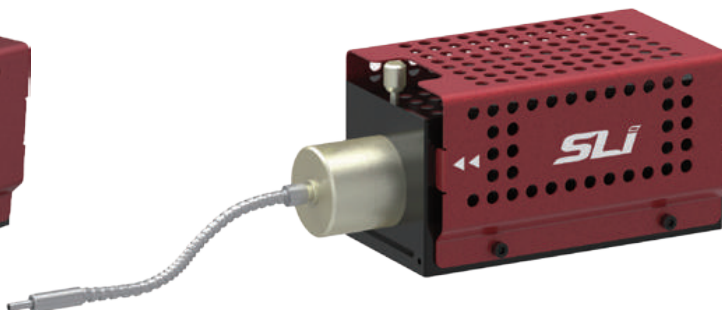

Fiber adaptor

Mighty Light PLUS – Tungsten Halogen (MLP-TH)

A powerful source of low-noise white light with versatile output modules

The Mighty Light PLUS (MLP) is a broadband light source that provides 10X higher spatial brightness than competitive sources: delivering up to 7 W of collimated output from a 10 mm diameter flexible light guide. Useful output spans 300 to 2500 nm and the low-noise output power is smoothly adjustable from 0 - 100 %. Applications include microscopy, white light interferometry, machine vision, and precision inspection.


Specifications

- Type of lamp : Tungsten Halogen
- Spectral wavelength : 300 - 2500 nm
- Lamp power consumption : 250 W
- Power stability : < 0.7 %
- Bulb lifetime : ~ 500 hours
- Color temperature : 3,400 K
- Dimensions : 340 x 160 x 140 mm
- Power control knob : 0 - 100 %
- Electrical requirements : AC 100 - 240 V, 50/60 Hz




* Fiber bundle included with light source

Features

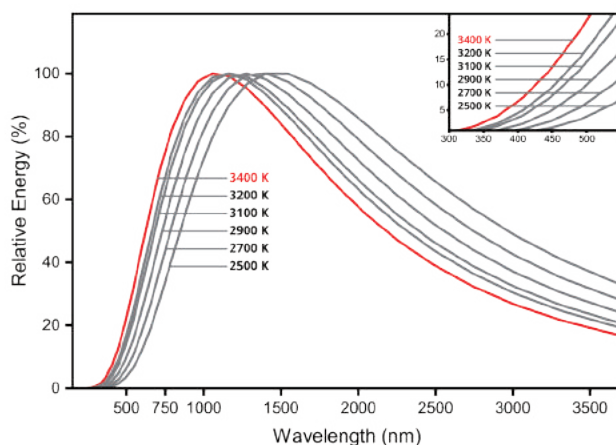

Broad output spectrum

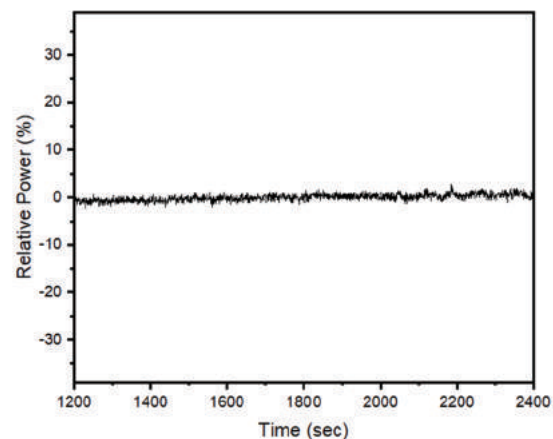

Low power fluctuation (High stability) : < 0.7 %

Supercontinuum Laser - SL-Pico

Powerful pico-second pulsed laser source with precision software controls



SL-Pico-V and SL-Pico-F are the newest picosecond pulsed supercontinuum laser sources. These lasers are high-power, very stable, capable of delivering up to 20 W of power, and have a broad spectral range from 410 to 2400 nm. The SL-Pico-F series is a mode-locked fiber laser with a fixed repetition rate (80 MHz), and the SL-Pico V series has a tunable repetition rate.



Wide broadband spectral range

SL-Pico: Supercontinuum laser

Model	Supercontinuum output power		Repetition Rate	Fundamental pulse width (ps)	Output pulse width (ps)	Spectral Range (nm)
	Visible	Total				
SLF10	100 mW	1 W	5 MHz	~ 100 ps	< 300 ps	450 - 2400 nm
SLF15	500 mW	1.5 W	20 MHz	~ 6 ps	< 50 ps	410 - 2400 nm
SLV80	1 W	8 W	0.01 to 200 MHz	~ 100 ps	< 300 ps	430 - 2400 nm
SLF70	2 W	7 W	80 MHz	~ 6 ps	< 50 ps	410 - 2400 nm

General Specifications

SL-Pico V Series


- Power stability : < 1 %
- Output pulse width : < 300 ps
- Internal repetition rate : 0.01- 200 MHz adjustable
- Sync(trigger) Output : (Optional) NIM Output 0 - (-1) V or TTL Output 0 - 3.3 V
- Beam diameter and quality : ~ 2 mm@633 nm; M2<1.1
- Beam divergence (Half angle) : < 1 mrad
- State of polarization : Unpolarized
- Length of output fiber : 1.5 m
- Input power : AC 100 - 240 V, 50/60 Hz
- Data interface : USB

SL-Pico F Series

- Power stability : < 1 %
- Output pulse width : < 50 ps (SLF10 : < 300 ps)
- Internal repetition rate : SLF10 : 5 MHz, SLF15 : 20 MHz, SLF70 : 80 MHz (fixed)
- Sync(trigger) Output : (Optional) NIM Output 0 - (-1) V or TTL Output 0 - 3.3 V
- Beam diameter and quality : ~ 2 mm@633 nm; M2<1.1
- Beam divergence (Half angle) : < 1 mrad
- State of polarization : Unpolarized
- Length of output fiber : 1.5 m
- Input power : AC 100 - 240 V, 50/60 Hz
- Data interface : USB


Supercontinuum Laser – SL-Pico

The SL-Pico can be applied to various applications requiring high power and repetition rates, such as low-noise OCT, fluorescence microscopy, nanophotonics, semiconductor inspection, ultra-high-resolution imaging capabilities, and other applications.

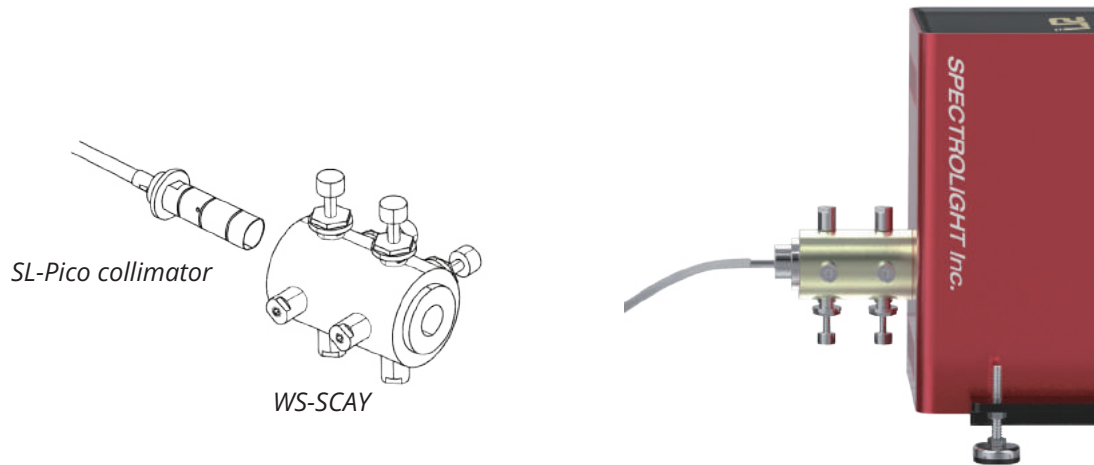


All models compatible with the FWS

- Powerful Supercontinuum Laser Source
- Easy connection and alignment using the WS-SCAY accessory.
- Fully compatible and tunable with the Flexible Wavelength Selector.

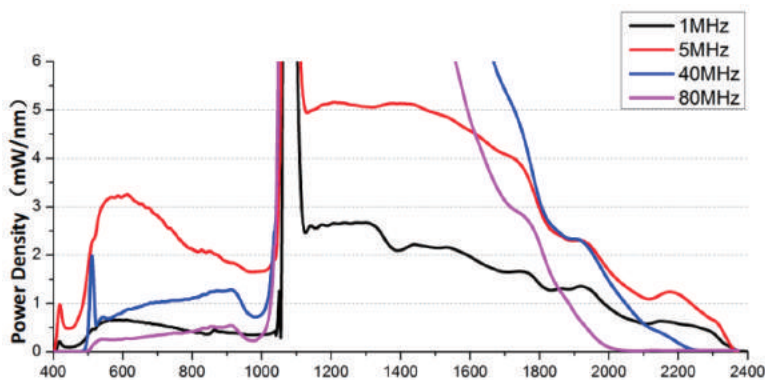

Typical spectrum of SL-Pico V80 at each repetition rate (1, 5, 40, 80 MHz)

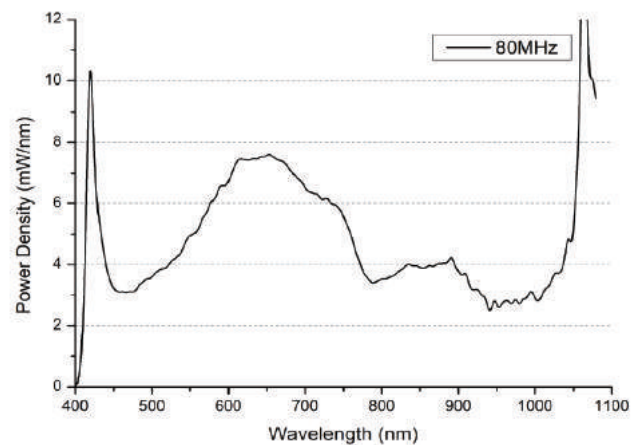

Typical spectrum of SL-Pico F70 at 80 MHz

Full Specifications

		SLF10	SLF15	SLF70	SLV80
Output power	Visible	100 mW	500 mW	2 W	1 W
	Total	1 W	1.5 W	7 W	8 W
Repetition Rate		5 MHz	20 MHz	80 MHz	0.01 to 200 MHz adjustable
Fundamental pulse width		~ 100 ps	~ 6 ps	~ 6 ps	~ 100 ps
Output pulse width		< 300 ps	< 50 ps	< 50 ps	< 300 ps
Spectral Range		450-2400 nm	410-2400 nm	410-2400 nm	430-2400 nm
Power stability		< 1 %			
Sync(trigger) Output		(Optional) NIM Output 0 - (-1) V or TTL Output 0 - 3.3 V			
Beam diameter and quality		~ 2 mm@633 nm; M2<1.1			
Beam divergence (Half angle)		< 1 mrad			
State of polarization		Unpolarized			
Length of output fiber		1.5 m			
Software		SL-Pico ver.1			
Dimension (L x W x H, mm)		340 x 370 x 150	440 x 470 x 150		
Input power		AC 100 - 240 V, 50/60 Hz			
Data interface		USB 2.0			

Laser-Driven Light Source (LDLS™)


EQ-99X-FC LDLS™

Energetiq's EQ-99X-FC LDLS is a high brightness fiber-coupled source with a broad wavelength range from UV to Visible and into the NIR region.


The unique principle of operation provides extremely bright, spatially and spectrally stable broadband radiation from 190 nm - 2500 nm with a lifetime greater than 10,000 hours.

Specifications


- Broadband optical power : 95 mW
(Measured with thermopile : UVFIBERX-230 fiber optic cable)
- Spectral wavelength : 190 - 2500 nm
- Spectral radiance (at 500 nm) : 25 - 75 mW/mm².sr.nm
(Different from the models)
- Plasma size (average FWHM) : 100 µm x 180 µm
- Numerical aperture (Output Fiber) : 0.22 NA
- Bulb lifetime : ~ 10,000 hours
- Laser class : Class 1 (IEC 60825-1: 2014)
- Power consumption : 100 - 240 V, 175 W, 50/60 Hz
- Dimension
 - Lamphead : 76 x 83 x 76 mm (0.7 kg)
 - Controller : 111 x 107 x 301 mm (1.4 kg)

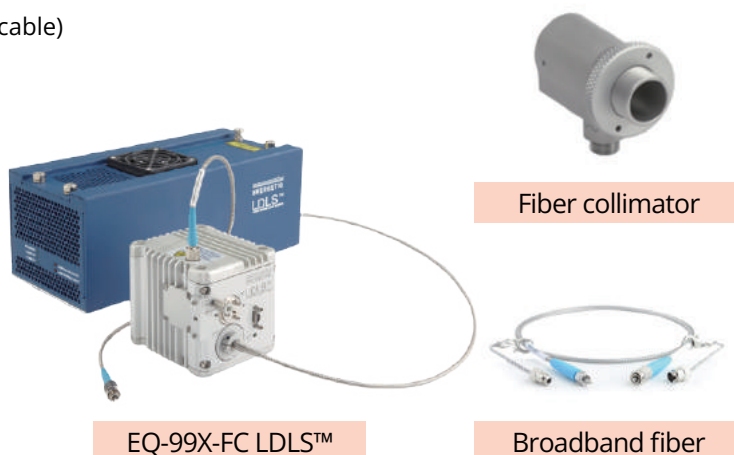

Features

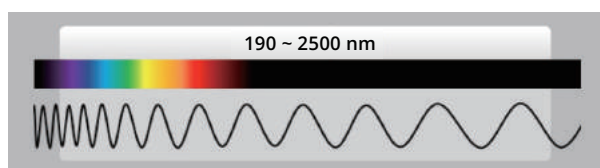


Wide broadband spectral range

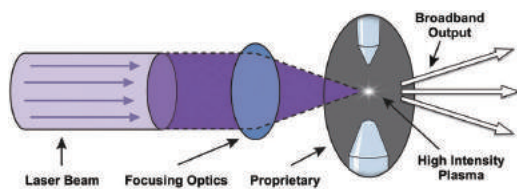

Small, high brightness broadband output

With ENERGETIQ's LDLS and FWS-Poly, it is possible to generate a tunable light covering a wide spectral range, 255 - 1650 nm.

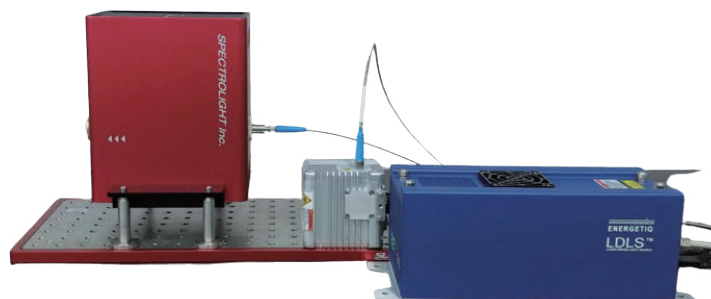

Application with FWS

SPECTROMETERS



- State-of-the-art Performance in a Miniaturized Package
- Easy-to-use Functions by PC control
- Available to the Diverse Applications

Spectrometers

A family of array-based spectrometers delivering computer controlled state-of-the-art-performance in a miniaturized package. These light-weight portable spectrometers are perfect for on-the-move applications.



SP245



SP642



SP303




SP303-HRS

Features

- Scientific-grade performance
- Low dark noise and stray light
- Flexible optical input: direct to slit or via fiber
- Optimum performance for a wide range of application
- High speed data acquisition
- Light-weight, portable, minaturized device



High performance with high-tech detector

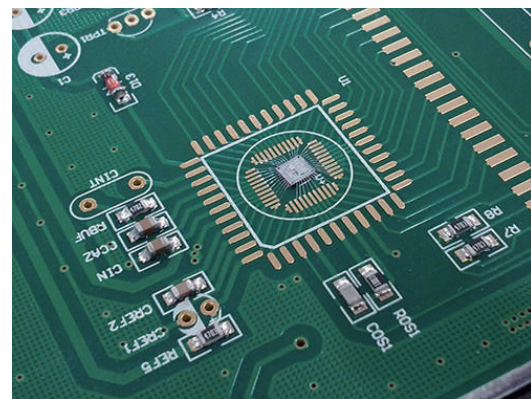


High signal to noise ratio

Full Specifications

		SP245	SP642	SP303	SP304
Wavelength Range		200 - 1050 nm	200 - 1050 nm	200 - 1100 nm	900 - 1700 nm
Detectors	No. of pixel	2048	2048 x 64	1024 x 58	512
	Pixel Size	14 x 200 um	14 x 14 um	24 x 24 um	25 x 250 um
	Cooling	X	X	O, (-10°C one stage TE cooling)	O, (-20°C one stage TE cooling)
Dark Noise RMS*		< 35 RMS @35 ms	< 9 RMS @35 ms	< 2 RMS @35 ms	< 6 RMS @100 ms**
Signal to Noise Ratio		> 300:1	> 450:1	> 1000:1	> 15,000:1 @100 ms
Optical Resolution		0.25 - 10 nm*	0.25 - 7 nm*	0.15 - 10 nm*	> 3 nm overall
Fiber Optic Connector		SMA905 or FC standard			
PC Interface		Windows XP/VISTA/Win7, 8.1, 10 (32/64bit) SM32Pro & SMProMX (free with spectrometer) Includes DLL libraries and SDKs for easy custom application development			

OPTICAL COMPONENTS

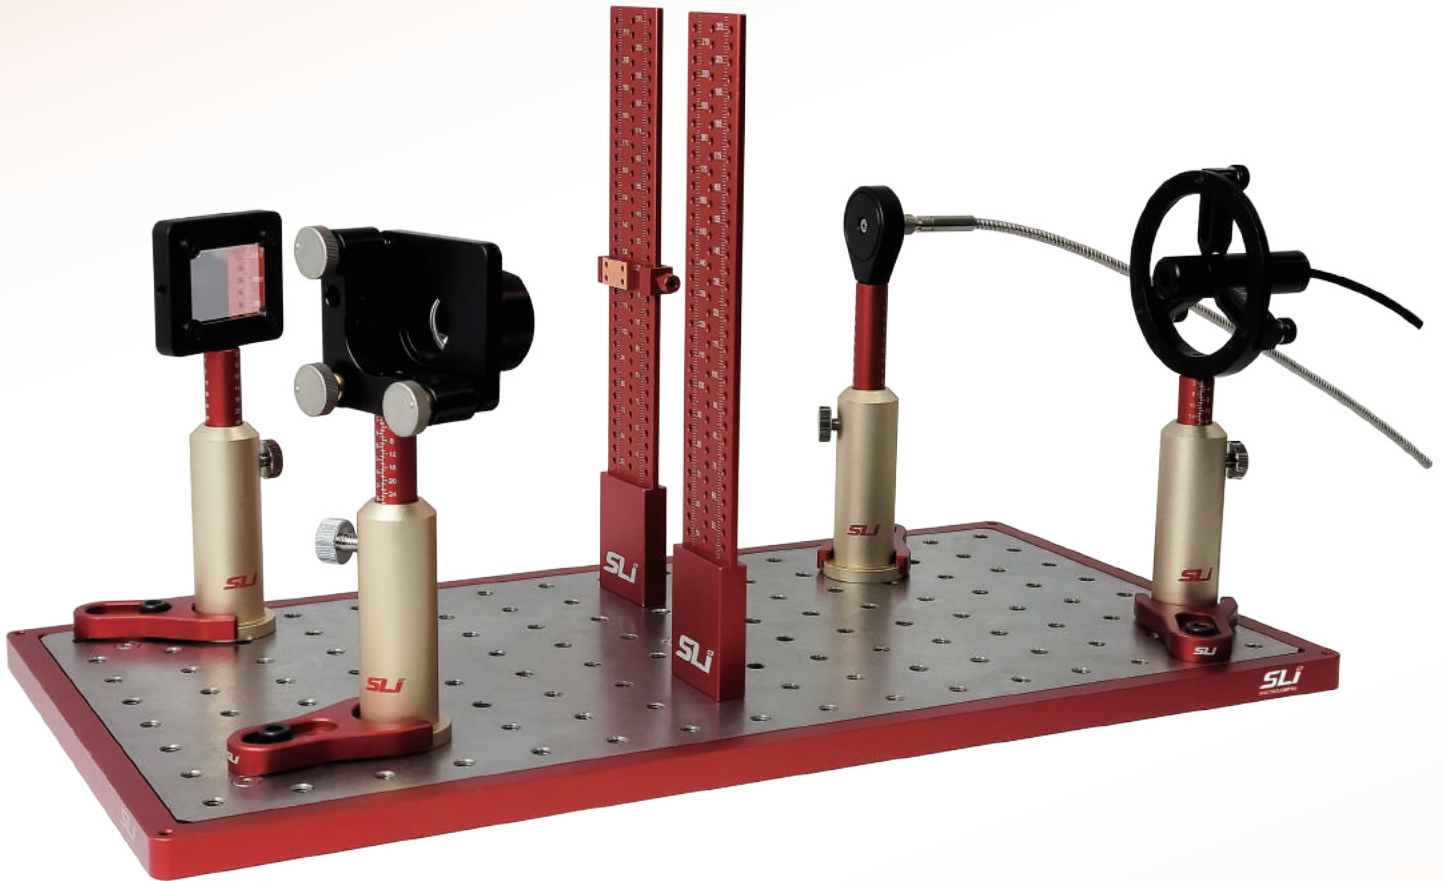

- Easy and Minute Light Alignment
- Precision Engraved Fiducials
- Lightweight and High Quality Stainless Board

Optomechanics - Light Aligner (LA)

Compatible for both Metric and Imperial (inch) versions

The Light Aligner (LA) is an anodized metal ruler that can be temporarily and accurately placed on any optical table, breadboard, or metal surface. LA solves the common problem of the alignment of laser or light beams in an optomechanical system on a breadboard or optical table. This brings complete freedom in its placement or precise beam alignment regardless of the mounting hole pattern on a table or breadboard. Optional extensions double the maximum height. The IR Slider accessory enables alignment of the IR beam which is otherwise invisible to the naked eye.

Specifications

Type	Item Number	Detail
Basic	LA-I8-B	Imperial Aligner Basic, 8.6 inches, Two poles
	LA-M220-B	Metric Aligner Basic, 220 mm, Two poles
Center	LA-I8-C	Imperial Aligner Center, 8.6 inches, Center pole
	LA-M220-C	Metric Aligner Center, 220 mm, Center pole
Free	LA-I8-F	Imperial Aligner Free standing, 8.6 inches, No poles
	LA-M220-F	Metric Aligner Free standing, 220 mm, No poles
Extender	LA-I8-E	Imperial Aligner Extender, 7.5 inches
	LA-M220-E	Metric Aligner Extender, 193 mm
Slider	LA-IR-C	Bolt-on accessory for IR detection, 18 mm x 10 mm

Features



Basic

Centers between rows of holes





Center

Centers over row of holes



Free Standing


Positions anywhere

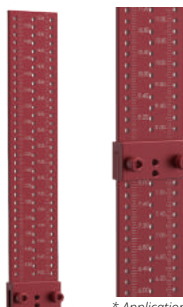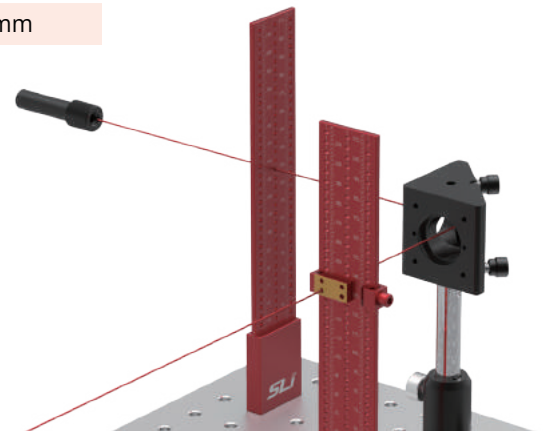

* Application example

Extender


Extends length of Light Aligner

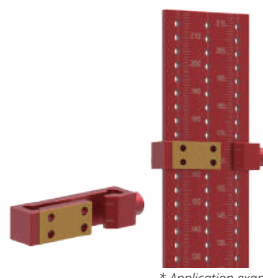

* Application example

IR Slider

Aligns infrared ray

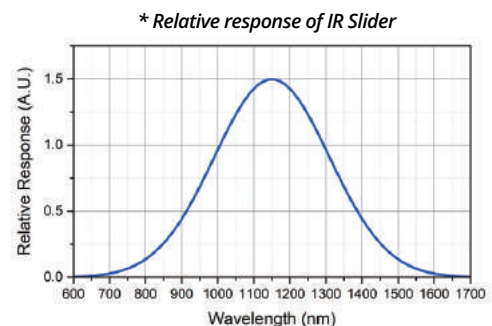


Optomechanics – Ruler Post

The Ruler Post is a simple solution to the frequent challenge of setting post mounted optics to a fixed/ common height above an optical table or breadboard. A clever locking clamp and magnetic base allows the Ruler Post to be securely located anywhere on the table surface.

Features



Precision engraved fiducials

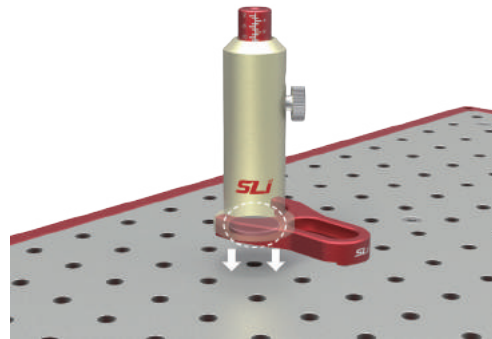


Magnetic base / Fork clamp


Optomechanics – Hybrid Board

The Hybrid Board is a thin, lightweight breadboard. Due to the aluminum base, it is suitable for optical assemblies, small sub-systems, and small optical experiments. The main work space is made of high quality stainless steel, allowing stable and precise application through magnetic accessories.

Features

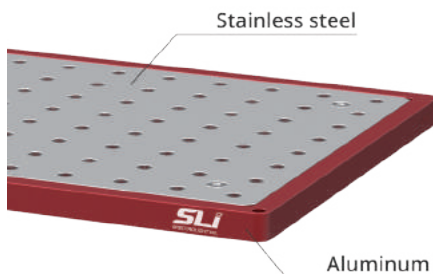

High quality stainless steel for magnetic appliances

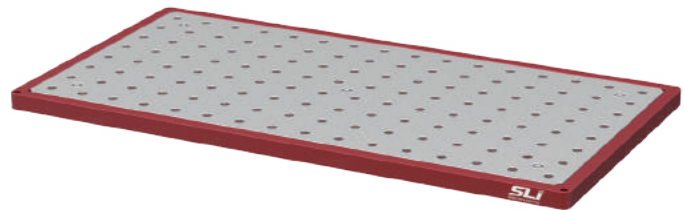

Light-weight aluminum base

Optomechanics – Fibers

Our multimode fibers are durable and high-quality patch cords that consistently deliver uniform results with minimal signal and energy variance. These products offer a wide range of fiber-optic cables, which can be made in a variety of lengths and configurations to meet users' needs.

Features




Durable and high-quality patch cords




SMA type connectors

Optomechanics Application

Modular optical microscopes

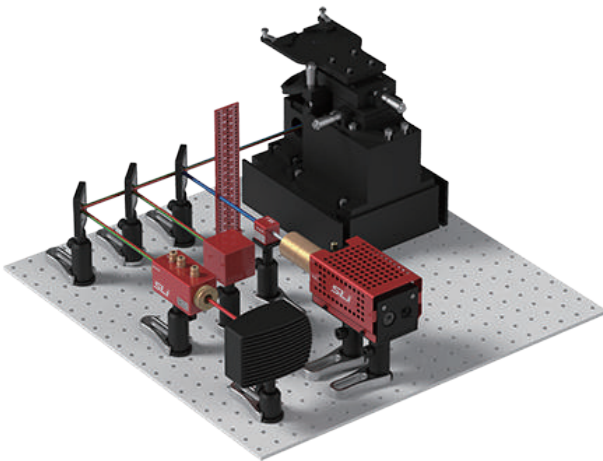

Infrared-ray light beam alignment

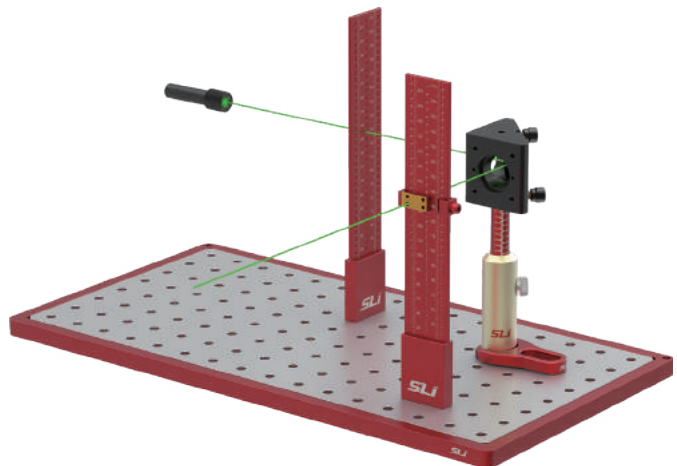

Light Done Right!

Headquarters	19800 MacArthur Blvd. Suite 300, Irvine, CA 92612 U.S.A.
	Website : www.spectrolightinc.com
	E-mail : info@spectrolightinc.com
Sales	Phone : (949) 800-7780
	E-mail : sales@spectrolightinc.com
Technical Support	Phone : (949) 800-5117
	E-mail : support@spectrolightinc.com
OEM Sales	Phone : (949) 800-7780
	E-mail : sales@spectrolightinc.com