


Flexible Wavelength Selector – Poly-RED



Model name	Spectral range (nm)
Poly-RED-UV	280 - 390
Poly-RED-VIS	430 - 790
Poly-RED-IR	775 - 1150
Poly-RED-SWIR	1140 - 1700
Poly-RED-Custom	Custom range

Spectral range (nm)	Tunable bandwidth (nm)
255 - 700	2 - 15
701 - 890	3 - 15
891 - 1500	5 - 15
1475 - 1700	7 - 13

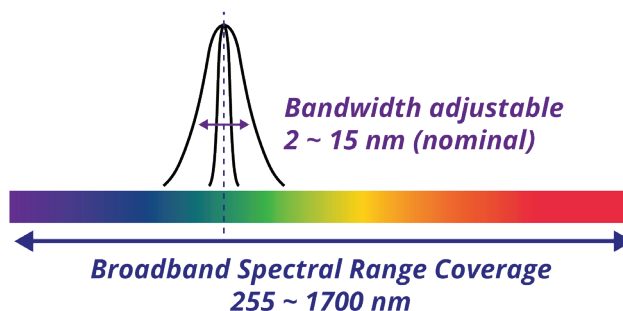

* Center Wavelength tuning range can vary by a few nanometers depending on the product.

* Minimum step size of center wavelength : 1 nm

* Step size of bandwidth (FWHM) : 1 nm

	FWHM	2 - 15								3 - 15		5 - 15				7 - 13	
	CWL	255 - 290	280 - 310	310 - 350	348 - 390	385 - 435	430 - 490	485 - 550	545 - 620	615 - 700	690 - 790	775 - 890	880 - 1015	1000 - 1150	1140 - 1310	1300 - 1500	1475 - 1700
Poly-RED-UV			●	●	●												
Poly-RED-VIS							●	●	●	●	●						
Poly-RED-IR												●	●	●			
Poly-RED-SWIR															●	●	●
Poly-RED-Custom							Up to 9 in one device										


Aperture size

Poly-RED-A5	5 mm	Suitable for supercontinuum lasers
Poly-RED-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)

* For optimal performance input light source must be collimated

Full Specifications

	Poly-RED-A5	Poly-RED-A10
Spectral range (nm)	255-1700	255-1700
Bandwidth (FWHM) (nm)	2-15 (nominal)	2-15 (nominal)
Aperture size (mm)	5	10
Out of band Blocking	OD 10 up to 1700 nm	
Step size of center wavelength (nm)	1.0	
Step size of bandwidth (FWHM) (nm)	1.0	
Wavelength accuracy (nm) : CWL, FWHM	< 1 nm	
Damage threshold	Pulse : Peak Fluence < 1.75 Joules/cm ² (~ 70 µm spot diam., 10 ns, 10 Hz, 532 nm LASER) CW (Continuous wave) : Intensity < 2 MW/cm ² (1064 nm, ~ 90 µm spot diam.)	
Transmission efficiency (%)	≥ 75 % (in proportion to the input light power / FWHM > 10 nm)	
Scanning speed (ms)	20 - 200 ms (depending on step size)	
Software	FWS-Auto ver 4.1	
Dimension (L x W x H, mm)	186.2 x 124 x 214	
Input power	DC 12 V, 5 A	
Electric requirement	AC 100 - 240 V, 50/60 Hz	
Data interface	USB 2.0	
Weight (kg)	4.2	

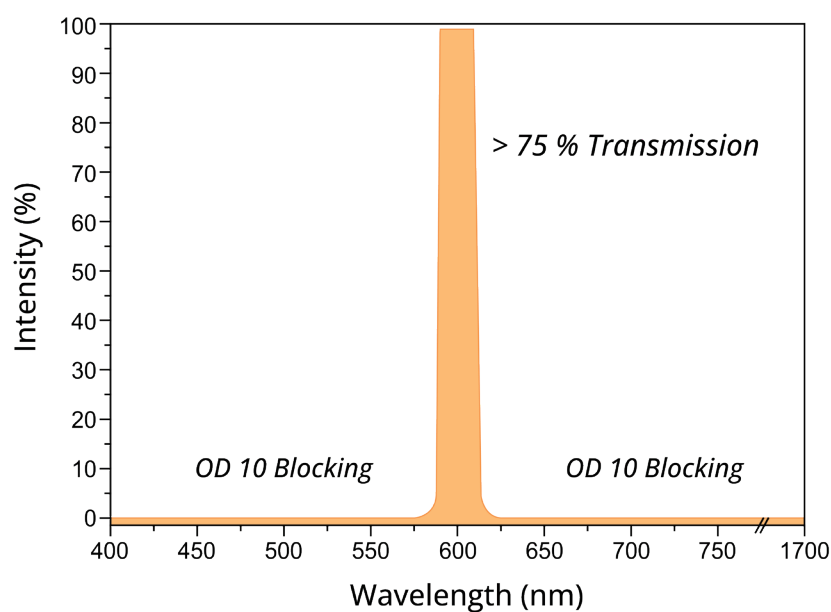

Wavelength Selection Guide

Poly-RED

FWHM	CWL	UV	VIS	IR	SWIR	CUSTOM
2 - 15	255 - 290					
	280 - 310	●				
	310 - 350	●				
	348 - 390	●				
	385 - 435					
	430 - 490		●			
	485 - 550		●			
	545 - 620		●			
	615 - 700		●			
3 - 15	690 - 790		●			
	775 - 890			●		
5 - 15	880 - 1015			●		
	1000 - 1150			●		
	1140 - 1310				●	
	1300 - 1500				●	
7 - 13	1475 - 1700				●	

* Units : nm

Poly-BLUE

FWHM	CWL	UV	VIS	IR	SWIR	CUSTOM
10 or 20 (nominal)	255 - 290					
	280 - 310	●				
	310 - 350	●				
	348 - 390	●				
	385 - 435					
	430 - 490		●			
	485 - 550		●			
	545 - 620		●			
	615 - 700		●			
	690 - 790		●			
	775 - 890			●		
	880 - 1015			●		
	1000 - 1150			●		
	1140 - 1310				●	
	1300 - 1500				●	
	1475 - 1700				●	

* Units : nm

Aperture size

Poly-A5	5 mm	Suitable for supercontinuum lasers
Poly-A10	10 mm	Suitable for light sources with large beam size (tungsten-halogen, plasma, LED)